ZOLARIS

LUMINAIRE

STANDARD
LED COLLECTION

LED Lighting Fixtures Collection

Indoor • Commercial • Industrial • Outdoor & Street Lighting




About ZOLARIS Luminaire

ZOLARIS Luminaire is a lighting brand specialized in modern LED luminaires, solar lighting technologies, custom-made lighting solutions, and luxury project-based products.

Our range covers indoor, commercial, industrial, outdoor, street, and solar lighting applications, including LED fixtures, solar poles, bollards, architectural lighting, decorative luminaires, and customized lighting systems for special projects.

With a strong focus on innovation, energy efficiency, and design flexibility, ZOLARIS Luminaire supports consultants, contractors, developers, architects, and project owners with reliable lighting solutions tailored to different technical and aesthetic requirements.

Our professional engineering team works closely with each project to provide suitable lighting selections, technical support, customization options, and solar technology solutions that meet the needs of modern developments, luxury spaces, infrastructure projects, and sustainable urban environments.

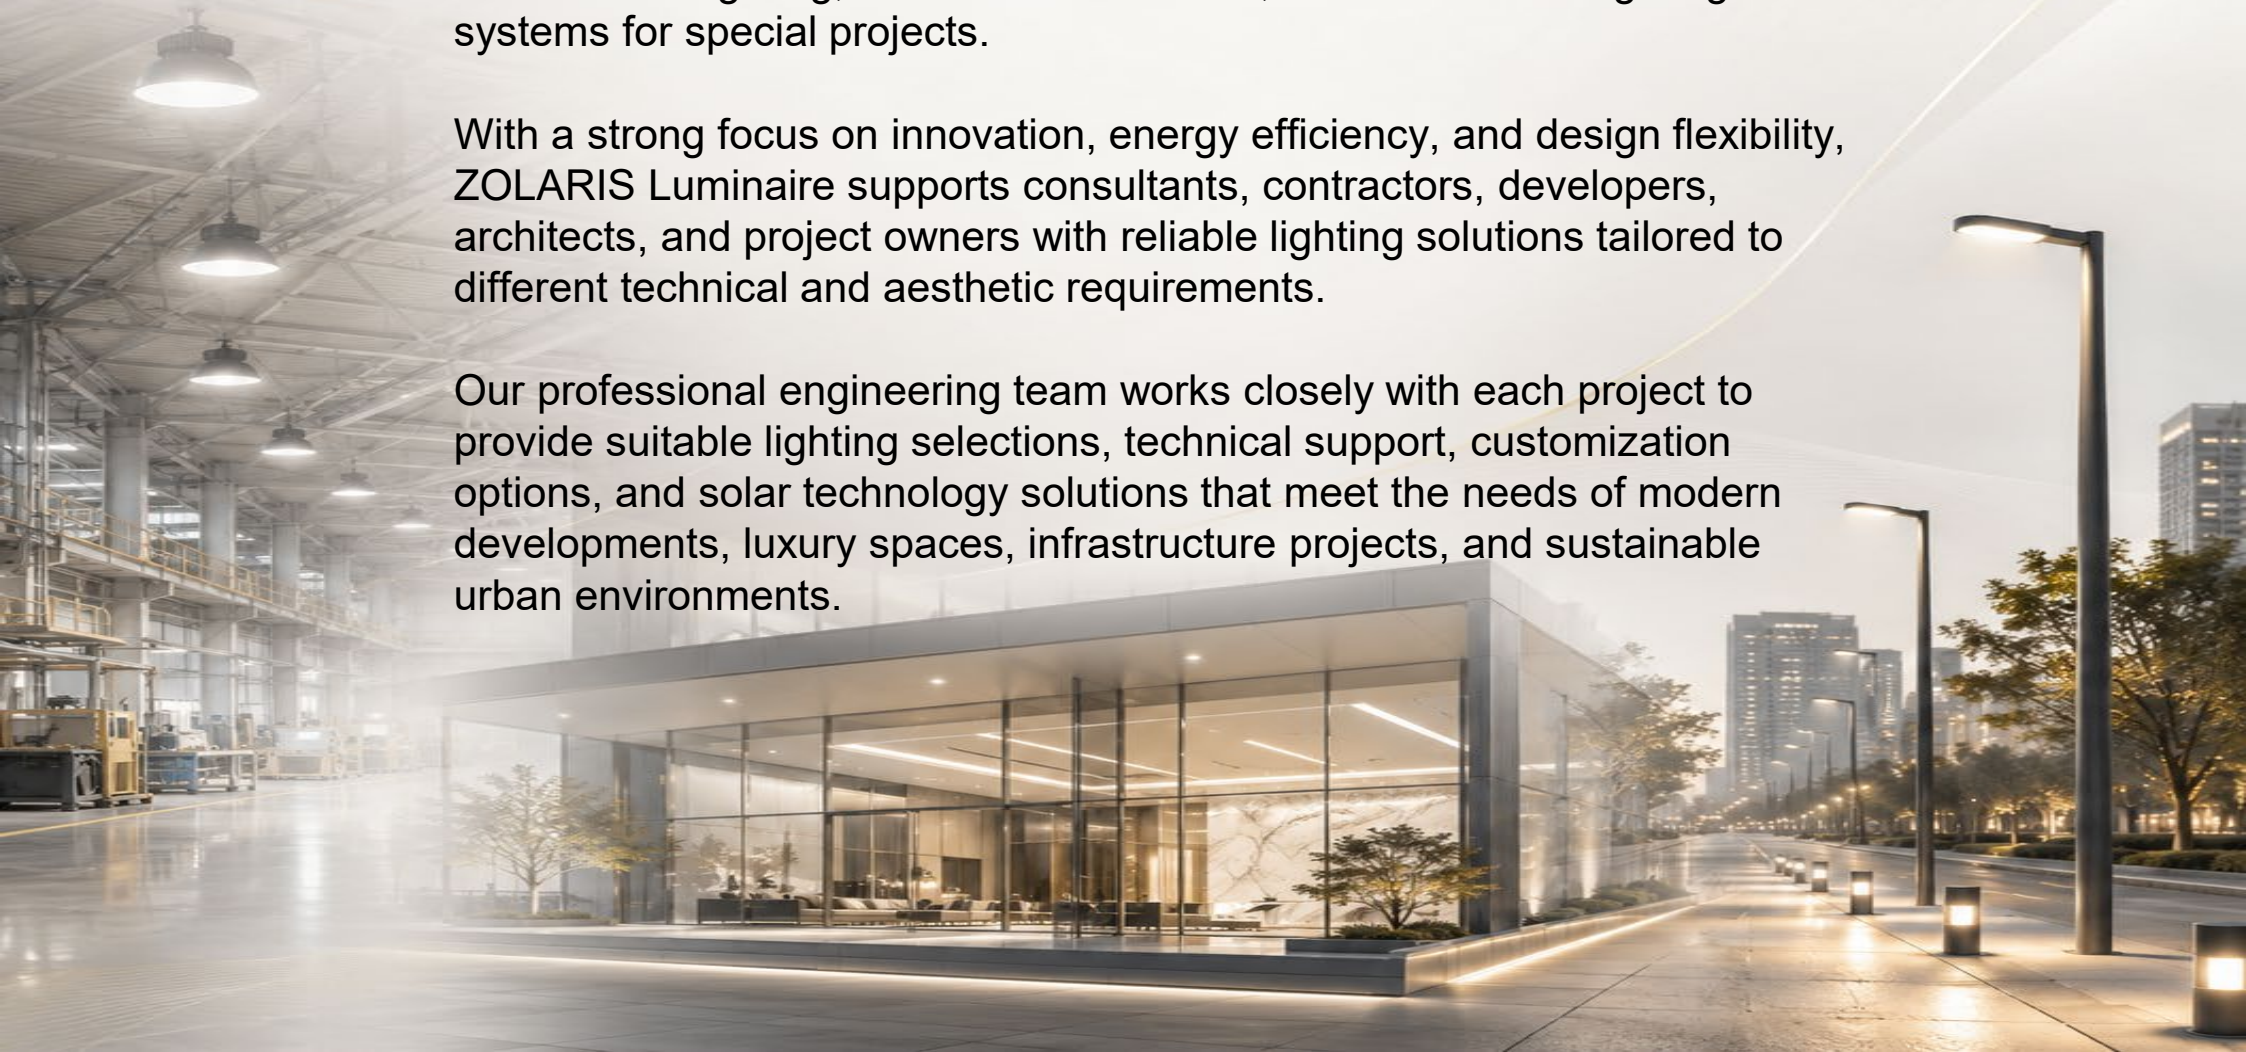

Index

01. About ZOLARIS Luminaire

02. Lighting Solutions Overview

03. Indoor LED Luminaires

04. Commercial Lighting

05. Industrial Lighting

06. Outdoor Lighting

07. Street Lighting

08. Custom-Made & Luxury Lighting Projects

09. Technical Support & Engineering

10. Contact Information

Indoor LED Fixture

Recessed Mounted

Downlight


TOKYO - 09



SEOUL - 10


MANILA - 11


PARIS - 12


PEKIN - 13

Panel


MIAMI - 15


MADRID - 16


SYDNEY - 17


NAIROBI - 18


IZMIR - 19

Linear


MILANO - 21

Surface - Pendent Mounted

Downlight


PERU - 23


TORONTO - 24


BERLIN - 25


OSAKA - 26


LAGOS - 27

Panel


LUANDA - 29


DAKAR - 30


AMMAN - 31


KIEV - 32

Linear


MEXICO - 34


MOSCOW - 35

Pendent


KANO - 37


FRANKFURT - 38


TAMPA - 39

Industrial LED Fixture

Waterproof

TUNIS - 41



HAVANA - 42



COLOMBO - 43



WARSAW - 44



ZIBO - 45



GIZA - 46



Highbay

INDORE - 48



BAKU - 49




NINGBO - 50




DEIR - 51




HAMA - 52



SANTA - 53



YIBIN - 54



Outdoor LED Fixture

Floodlight

TABRIZ - 56



HAMBURG - 57



BUDAPEST - 58



VIENNA - 59



RUGAO - 60



AGRA - 61



TASHKENT - 62



BURSA - 63




BURSA-II - 64




Streetlight

LUSAKA - 66




CALGARY - 67




MULTAN - 68



BRUSSELS - 69



DUBLIN - 70




KALYAN - 71



PRAGUE - 72



SOFIA - 73



VALENCIA - 74




ODESSA - 75




KOCHI - 76



LINZHOU - 77



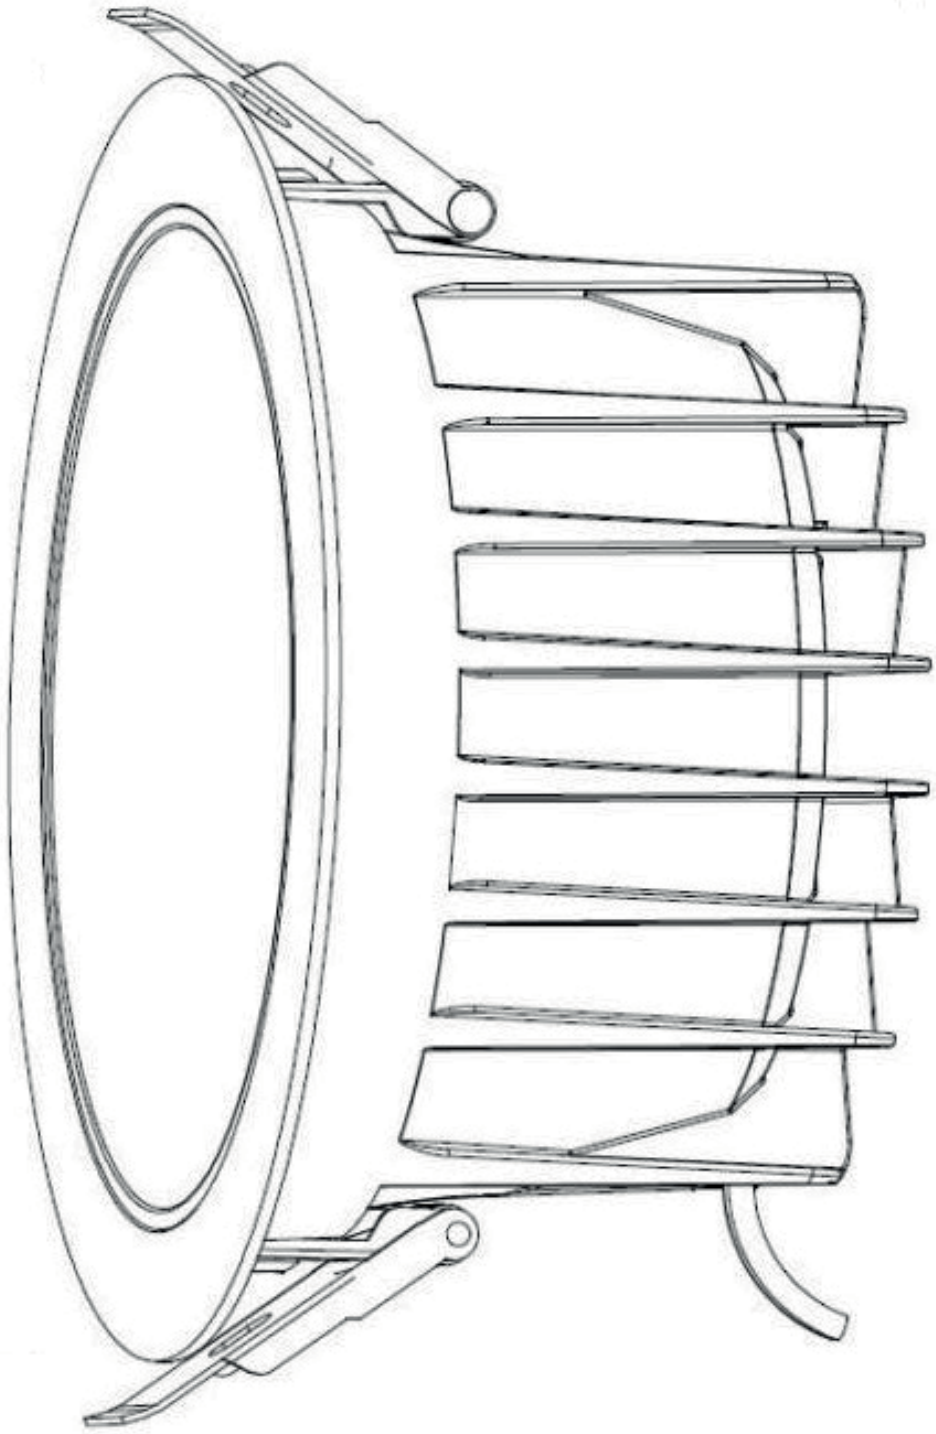


RECESSED MOUNTED DOWNLIGHT


TOKYO


Recessed Mounted Downlight Luminaire

SPECIFICATIONS:

Body:	Aluminium Injection Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Diffuser:	1mm Opal Diffuser High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	0°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable, Emergency







RAL9016 RAL9006 RAL9005



LM80 TM21 SDCM <3 IP 40

LED 45°C 0°C 198Vac 265Vac

DIMMABLE 1-10V DIMMABLE 3 StepDIM DALI


Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
DWRTK-010	10	104	1044	>0,9	2700K - 3000K 4000K - 5000K 6500K	80+ / 90+	95x95x42	0,14	60x63x46	84
DWRTK-015	15	94	1402				127x127x46	0,23	60x63x46	84
DWRTK-020	20	116	2325				194x194x58	0,48	60x63x46	42
DWRTK-030	30	108	3235				223x223x55	0,6	60x63x46	22


SEOUL


Recessed Mounted Downlight Luminaire

SPECIFICATIONS:

Body:	Aluminium Injection Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Diffuser:	1mm Transparent Plexiglass High Efficiency Upto 95%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	0°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable, Emergency







RAL9016 RAL9006 RAL9005



LM80 TM21 SDCM <3 IP 40

LED 45°C 0°C 198Vac 265Vac

DIMMABLE 1-10V DIMMABLE 3 StepDIM DALI


Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
DWRSL-008	8	112	896	>0,9	2700K - 3000K 4000K - 5000K 6500K	80+ / 90+	97x97x45	0,48	60x63x46	84
DWRSL-010	10	113	1130				117x117x45	0,63	60x63x46	84
DWRSL-012	12	108	1296				147x147x45	0,77	60x63x46	48
DWRSL-015	15	110	1650				175x175x45	0,86	60x63x46	42
DWRSL-018	18	107	1926				190x190x45	1,02	60x63x46	42
DWRSL-023	23	110	2530				227x227x45	1,18	60x63x46	22


MANILA


Recessed Mounted Downlight Luminaire

SPECIFICATIONS:

Body:	Aluminium Injection Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Diffuser:	1mm Opal Diffuser High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	0°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable, Emergency



















Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
DWRMN-008	8	107	856	>0,9	2700K - 3000K 4000K - 5000K 6500K	80+ / 90+	97x97x60	0,52	60x63x46	84
DWRMN-010	10	104	1040				117x117x60	0,67	60x63x46	84
DWRMN-012	12	105	1260				147x147x60	0,82	60x63x46	48
DWRMN-015	15	112	1680				175x175x60	0,95	60x63x46	42
DWRMN-018	18	108	1944				190x190x65	1,12	60x63x46	42
DWRMN-023	23	104	2392				227x227x65	1,28	60x63x46	22


PARIS


Recessed Mounted Downlight Luminaire

SPECIFICATIONS:

Body:	Aluminium Injection Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic / LED&LUX Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Diffuser:	1mm Opal Diffuser High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	0°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable, Emergency



















Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
DWRPR-003	3	85	255	>0,9	2700K - 3000K 4000K - 5000K 6500K	80+ / 90+	85x85x25	0.09	48x48x23	100
DWRPR-006	6	85	510				120x120x25	0.14	65x38x31	100
DWRPR-009	9	85	765				145x145x25	0.19	47x38x36	60
DWRPR-012	12	85	1020				174x174x25	0.26	38x38x42	40
DWRPR-015	15	85	1275				200x200x25	0.31	43x38x47	40
DWRPR-018	18	85	1530				225x225x25	0.37	48x38x27	20
DWRPR-024	24	85	2040				300x300x25	0.60	38x32x34	10


PEKIN


Recessed Mounted Downlight Luminaire

SPECIFICATIONS:

Body:	Aluminium Injection Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic / LED&LUX Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Diffuser:	1mm Opal Diffuser High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	0°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable, Emergency













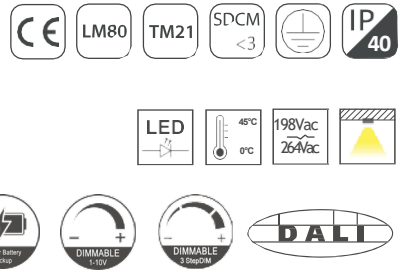

Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
DWRPK-003	3	85	255	>0,9	2700K - 3000K 4000K - 5000K 6500K	80+ / 90+	85x85x25	0.11	48x48x23	100
DWRPK-006	6	85	510				120x120x25	0.18	65x38x31	100
DWRPK-009	9	85	765				148x148x25	0.26	47x38x36	60
DWRPK-012	12	85	1020				172x172x25	0.33	38x38x42	40
DWRPK-015	15	85	1275				200x200x25	0.43	43x38x47	40
DWRPK-018	18	85	1530				225x225x25	0.55	48x38x27	20
DWRPK-024	24	85	2040				300x300x25	0.84	32x38x34	10

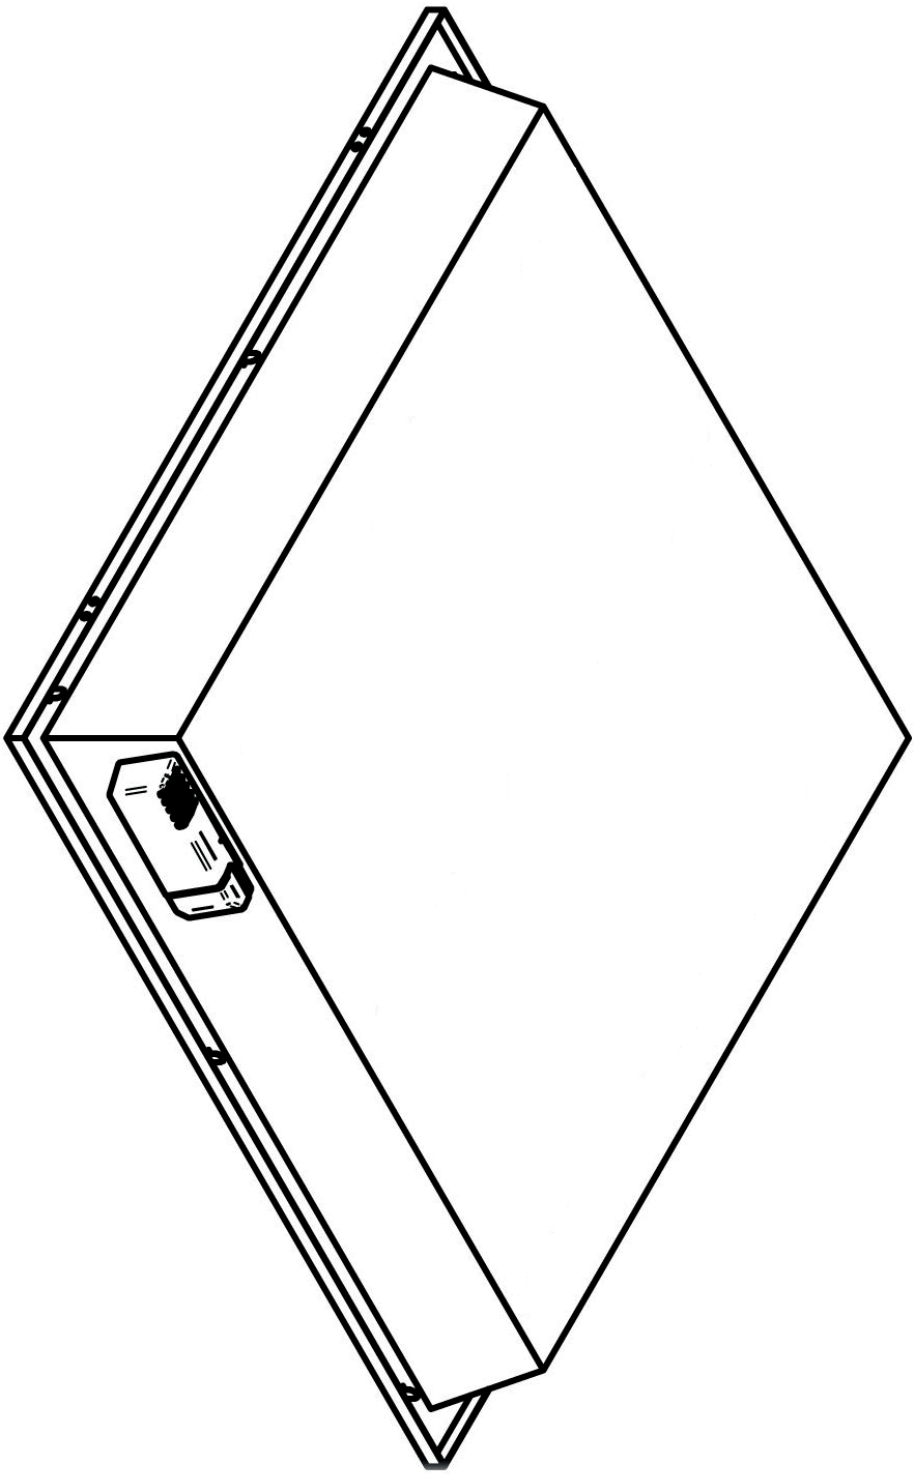


RECESSED MOUNTED PANEL


MIAMI


Recessed Mounted Panel Luminaire

SPECIFICATIONS:

Body:	DKP Metal Sheet Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Diffuser:	1mm Opal Diffuser High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	0°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable, Emergency



















Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
PNRMM-014	14	112	1568	>0,9	2700K - 3000K 4000K - 5000K 6500K	80+ / 90+	295x295x60	0,95	62x32x17	4
PNRMM-020	20	110	2200				295x595x60	1,83	62x32x17	2
PNRMM-040	40	115	4600				595x595x60	3,21	61x63x17	2
PNRMM-140	40	112	4480				295x1195x60	3,25	31x122x17	2
PNRMM-080	80	108	8640				595x1195x60	5,84	62x122x17	2


MADRID


Recessed Mounted Panel Luminaire


SPECIFICATIONS:


Body:	DKP Metal Sheet Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Diffuser:	1mm Opal Diffuser High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	0°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable, Emergency










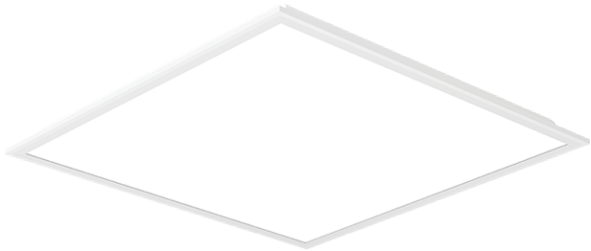

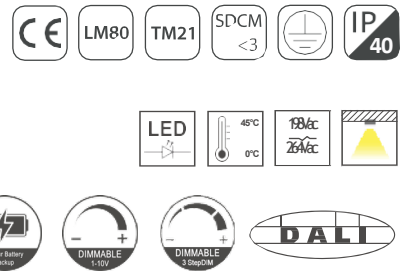


Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
PNRMD-014	14	90	1260	>0,9	2700K - 3000K 4000K - 5000K 6500K	80+ / 90+	295x295x30	0,61	38x32x38	10
PNRMD-020	20	87	1740				295x595x30	0,98	32x21x63	10
PNRMD-040	40	95	3800				595x595x30	1,45	65x39x65	10
PNRMD-048	48	86	4128				595x595x30	1,45	65x39x65	10
PNRMD-140	40	92	3680				295x1195x30	2,03	32x24x123	5


SYDNEY


Recessed Mounted Panel Luminaire


SPECIFICATIONS:

Body:	DKP Metal Sheet Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Diffuser:	Reflector / Diffuser High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	0°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable, Emergency












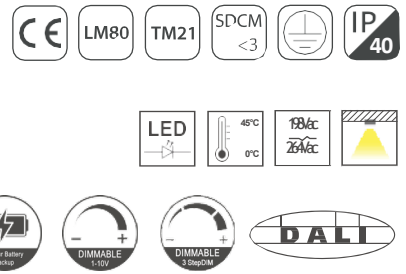


Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
PNRSY-035	35	95	3325	>0,9	2700K - 3000K 4000K - 5000K 6500K	80+ / 90+	595x595x80	5,35	61x63x17	2
PNRSY-040	40	93	3720				595x595x80	5,35	61x63x17	2
PNRSY-048	48	93	4464				595x595x80	5,42	61x63x17	2
PNRSY-054	54	91	4914				595x595x80	5,42	61x63x17	2


NIROBI


Recessed Mounted Panel Luminaire

SPECIFICATIONS:

Body:	DKP Metal Sheet Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Diffuser:	1mm Opal Diffuser & Lens High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	0°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable, Emergency












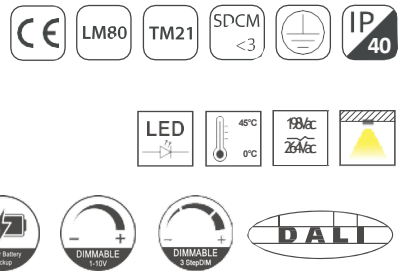


Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
PNRNI-035	35	90	3150	>0,9	2700K - 3000K 4000K - 5000K 6500K	80+ / 90+	595x595x85	5,62	61x63x17	2
PNRNI-040	40	87	3480				595x595x85	5,62	61x63x17	2
PNRNI-050	50	93	4650				595x595x85	5,75	61x63x17	2
PNRNI-054	54	90	4860				595x595x85	5,75	61x63x17	2


IZMIR


Recessed Mounted Panel Luminaire

SPECIFICATIONS:

Body:	DKP Metal Sheet Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Diffuser:	1mm Opal Diffuser High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	0°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable, Emergency







RAL9016 RAL9006 RAL9005




LM80 TM21 SDCM <3 IP 40

LED 45°C 0°C 198Vac 264Vac

3 Hour Battery Backup 1 Hour Battery Backup DIMMABLE 1-10V DIMMABLE 3 StepDIM DALI

Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
PNRIZ-048	48	92	4416	>0,9	2700K - 3000K 4000K - 5000K 6500K	80+ / 90+	595x595x75	5,48	61x63x17	2
PNRIZ-056	56	89	4984				595x595x75	5,48	61x63x17	2
PNRIZ-148	48	95	4560				595x595x75	5,48	61x63x17	2
PNRIZ-156	56	93	5208				595x595x75	5,72	61x63x17	2
PNRIZ-168	68	90	6120				595x595x75	5,72	61x63x17	2

RECESSED MOUNTED LINEAR

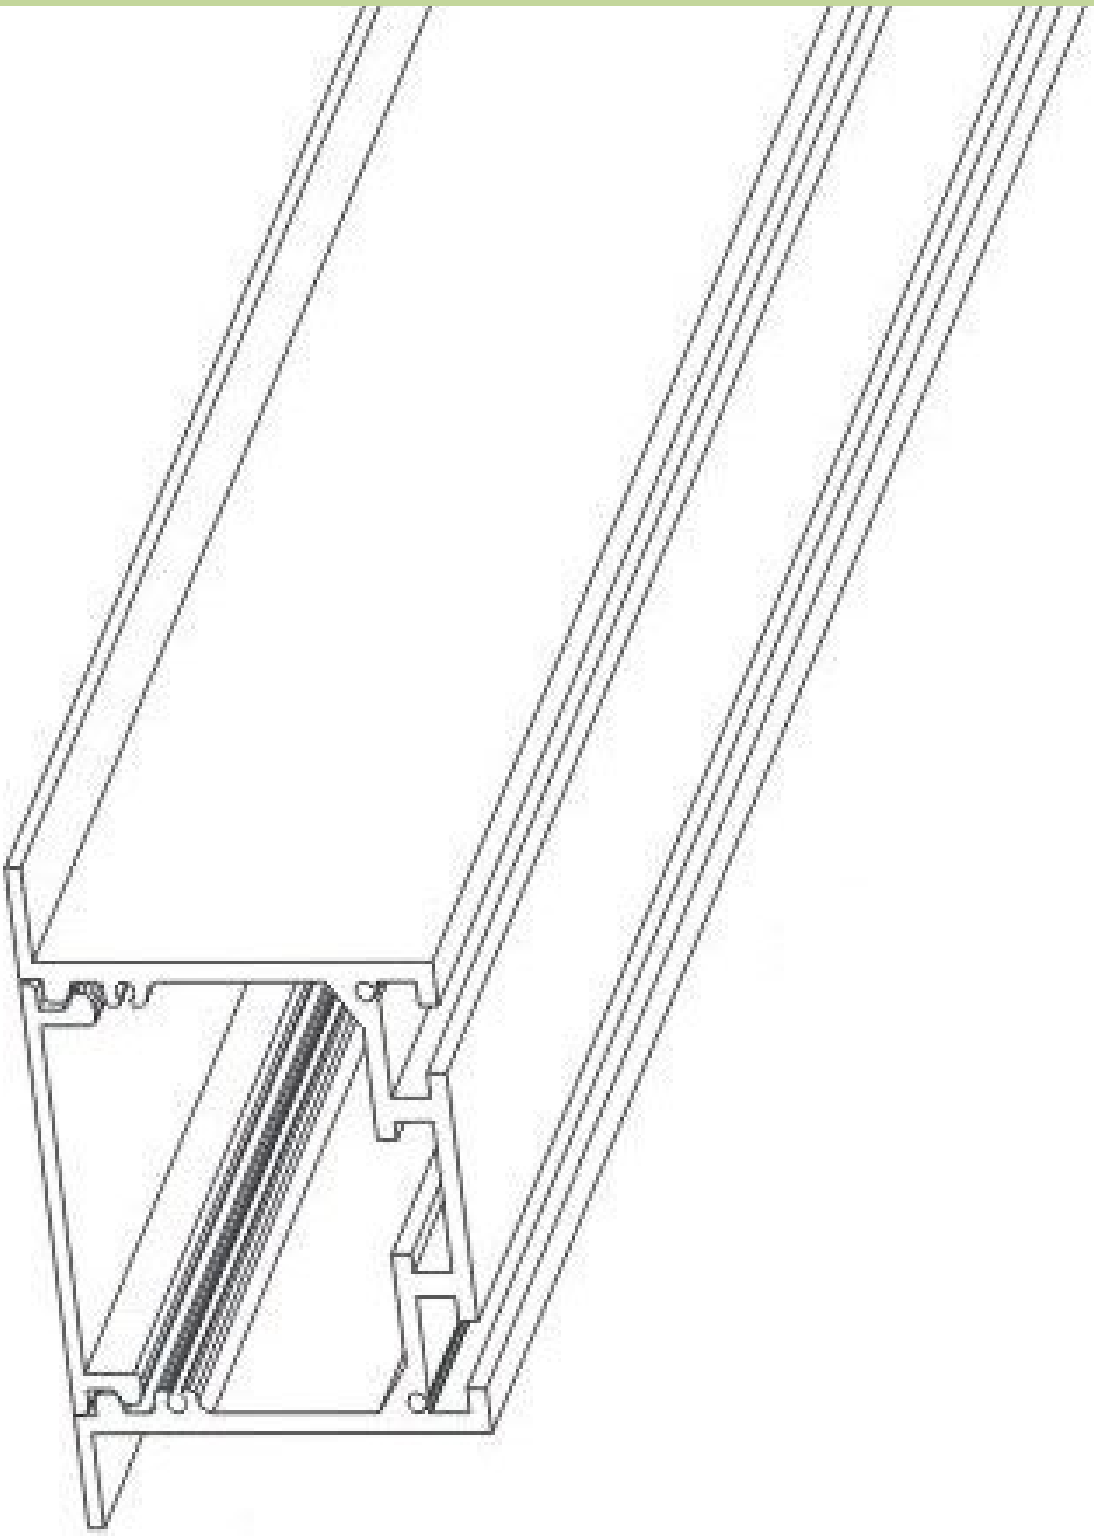



MILANO


Recessed Mounted Linear Luminaire

SPECIFICATIONS:

Body:	Aluminium Extrusion Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Diffuser:	1mm Opal Diffuser High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	0°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable, Emergency













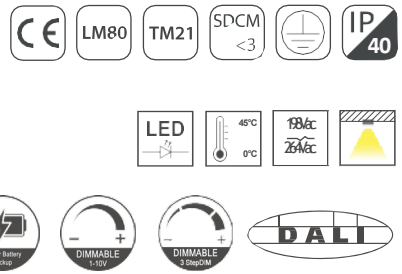

Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
LNRML-010	10	110	1100	>0,9	2700K - 3000K 4000K - 5000K 6500K	80+ / 90+	320x77x64	0,85	675x25x11	4
LNRML-020	20	110	2200				620x77x64	1,05	675x25x11	2
LNRML-030	30	109	3270				920x77x64	1,60	1275x25x11	2
LNRML-040	40	110	4400				1220x77x64	1,85	1275x25x11	2
LNRML-050	50	108	5400				1520x77x64	2,05	1575x25x11	2
LNRML-060	60	106	6360				1820x77x64	2,40	1875x85x70	1

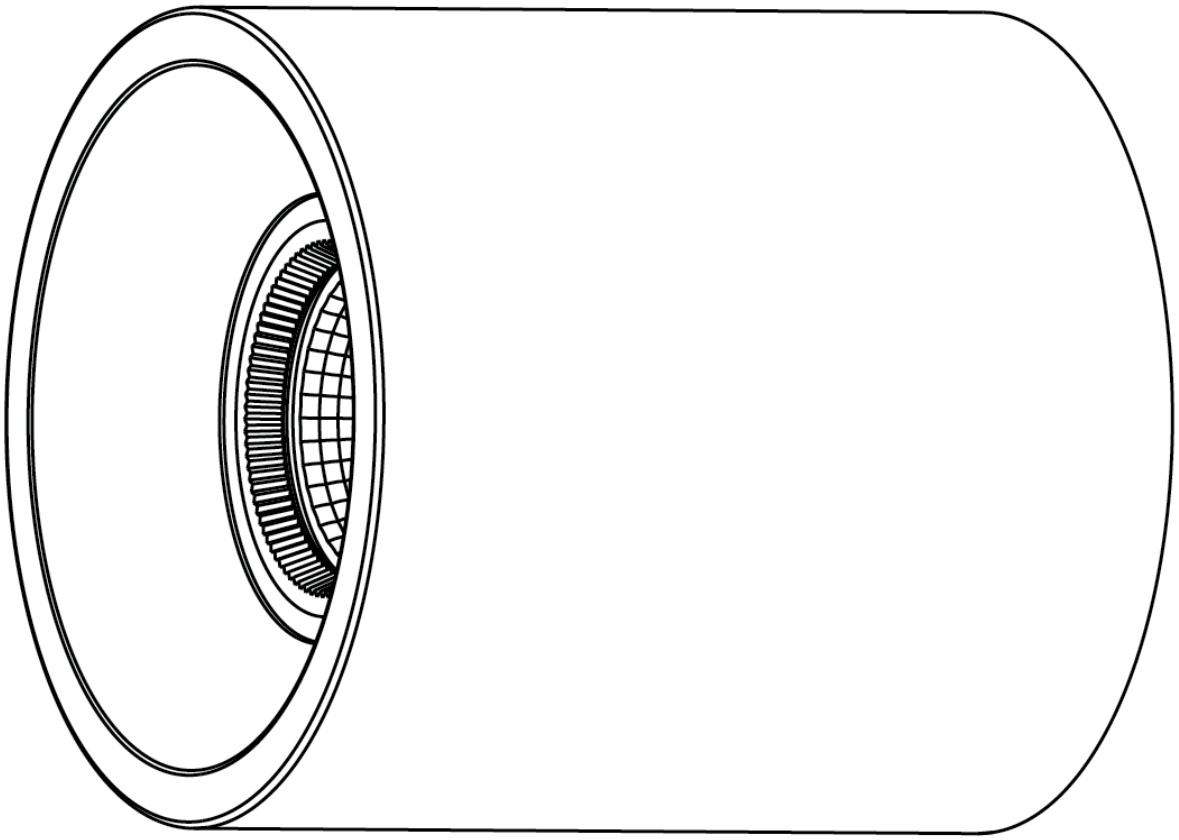


SURFACE MOUNTED DOWNLIGHT


PERU


Surface Mounted Downlight Luminaire

SPECIFICATIONS:

Body:	Aluminium Injection Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Diffuser:	1mm Opal Diffuser High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	0°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable, Emergency



















Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
DWSPR-010	10	104	1044	>0,9	2700K - 3000K 4000K - 5000K 6500K	80+ / 90+	100x100x100	0,28	60x20x10	20
DWSPR-015	15	94	1402				133x133x100	0,52	70x29x21	20
DWSPR-020	20	116	2325				200x200x100	0,79	110x43x21	20
DWSPR-030	30	108	3235				233x233x100	1,15	75x55x21	12


TORONTO


Surface Mounted Downlight Luminaire

SPECIFICATIONS:

Body:	Aluminium Injection Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Diffuser:	1mm Transparent Plexiglass High Efficiency Upto 95%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	0°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable, Emergency







RAL9016 RAL9006 RAL9005



LM80 TM21 SDCM <3 IP 40

LED 45°C 0°C 198Vac 264Vac

3 Hour Battery Backup · 1 Hour Battery Backup · DIMMABLE 1-10V · DIMMABLE 3 StepDIM · DALI


Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
DWSTN-007	7	115	805	>0,9	2700K - 3000K 4000K - 5000K 6500K	80+ / 90+	110x110x100	1,00	42x39x30	12
DWSTN-010	10	112	1120				130x130x100	1,20	42x39x30	12
DWSTN-012	12	112	1344				150x150x100	1,45	52x50x34	12
DWSTN-015	15	110	1650				150x150x100	1,55	52x50x34	12
DWSTN-025	25	108	2700				200x200x100	1,72	45x42x34	12
DWSTN-030	30	110	3300				240x240x100	1,95	52x50x34	12


BERLIN


Surface Mounted Downlight Luminaire

SPECIFICATIONS:

Body:	Aluminium Injection Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Diffuser:	1mm Opal Diffuser High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	0°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable, Emergency












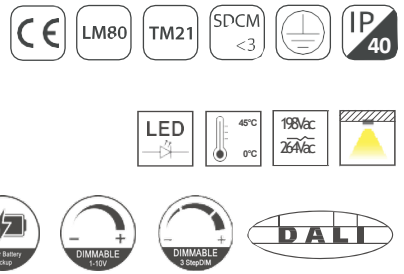


Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
DWSBR-012	12	108	1296	>0,9	2700K - 3000K 4000K - 5000K 6500K	80+ / 90+	180x180x50	1,15	45x42x34	24
DWSBR-015	15	105	1575				200x200x50	1,35	45x42x34	24
DWSBR-020	20	110	2200				250x250x80	1,60	52x50x34	24
DWSBR-025	25	107	2675				250x250x80	1,75	52x50x34	24


OSAKA


Surface Mounted Downlight Luminaire

SPECIFICATIONS:

Body:	Aluminium Injection Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic / LED&LUX Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Diffuser:	1mm Opal Diffuser High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	0°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable, Emergency







RAL9016 RAL9006 RAL9005



LM80 TM21 SDCM <3 IP40

LED 45°C 0°C 198Vac 264Vac

DIMMABLE 1-10V DIMMABLE 3 StepDIM DALI


Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
DWSOS-006	6	85	510	>0,9	3000K - 4000K 6500K	80+	120x120x40	0,25	48x40x27	60
DWSOS-012	12	85	1020				174x174x40	0,41	48x38x38	40
DWSOS-018	18	85	1530				225x225x40	0,62	48x48x25	20
DWSOS-024	24	85	2040				300x300x40	0,87	48x32x33	10


LAGOS


Surface Mounted Downlight Luminaire

SPECIFICATIONS:

Body:	Aluminium Injection Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic / LED&LUX Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Diffuser:	1mm Opal Diffuser High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	0°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable, Emergency







RAL9016 RAL9006 RAL9005




LM80 TM21 SDCM <3 IP 40

LED 45°C 0°C 198Vac 264Vac

DIMMABLE 1-10V DIMMABLE 3 StepDIM DALI

Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
DWSLG-006	6	85	510	>0,9	3000K - 4000K 6500K	80+	120x120x40	0,29	48x40x27	60
DWSLG-012	12	85	1020				172x172x40	0,48	48x38x38	40
DWSLG-018	18	85	1530				225x225x40	0,67	48x48x25	20
DWSLG-024	24	85	2040				300x300x40	1,06	48x32x33	10

SURFACE MOUNTED PANEL

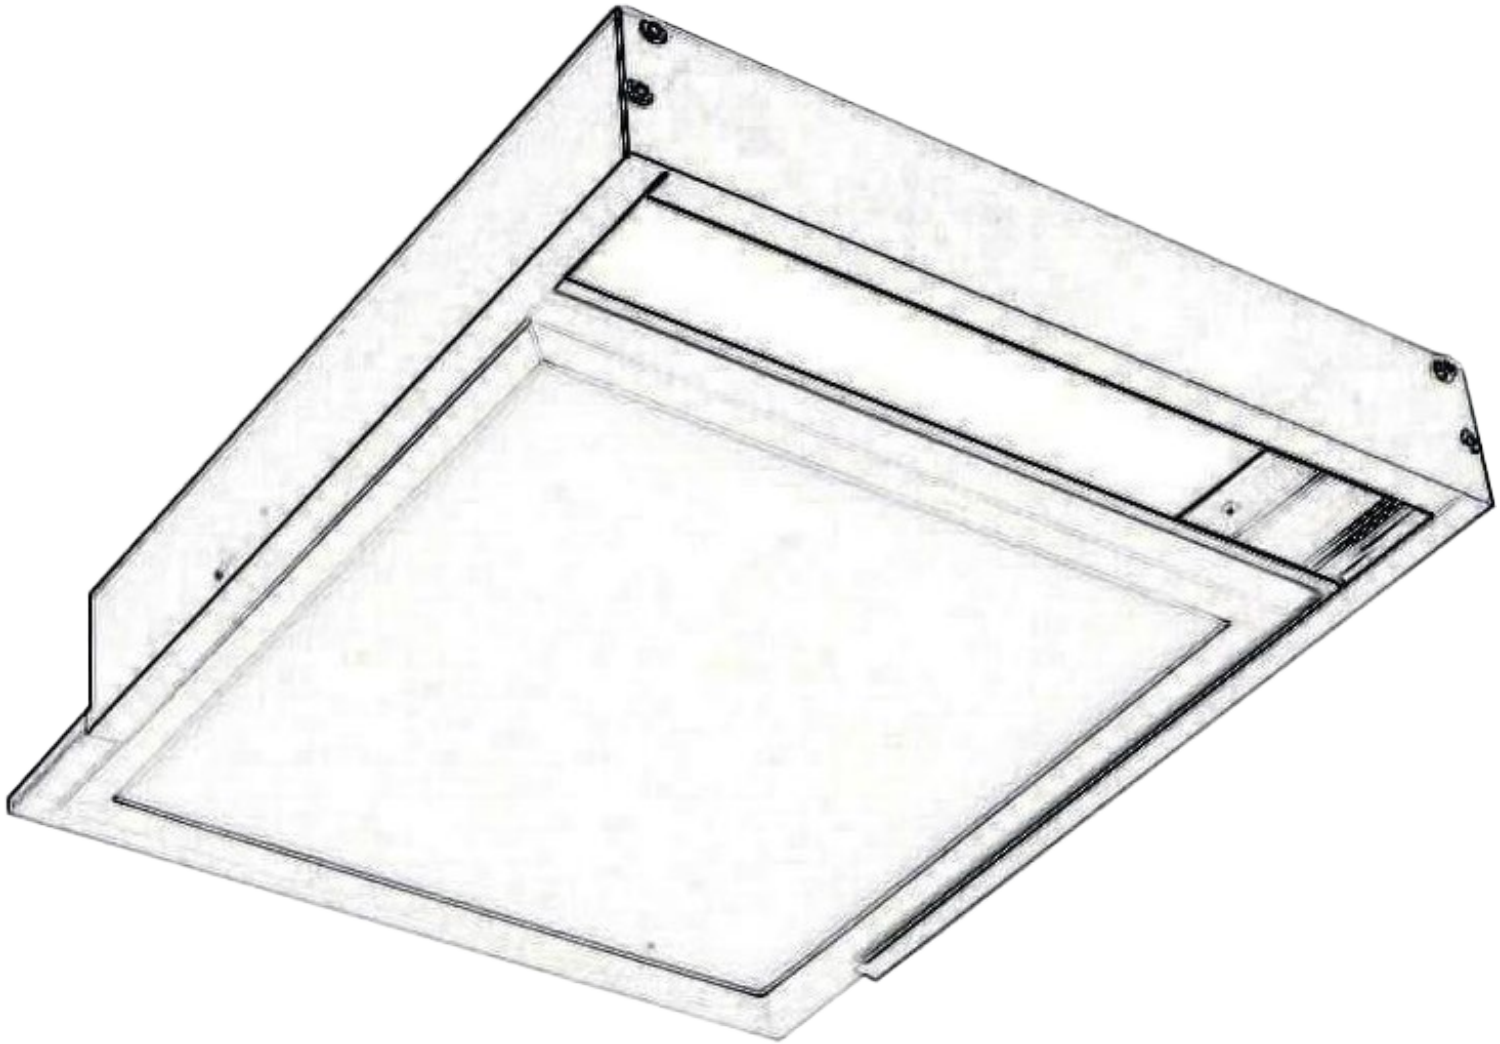



LUANDA


Surfaced Mounted Panel Luminaire


SPECIFICATIONS:

Body:	DKP Metal Sheet Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Diffuser:	1mm Opal Diffuser High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	0°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable, Emergency












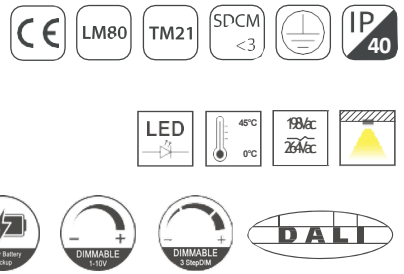


Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
PNSLU-014	14	112	1568	>0,9	2700K - 3000K 4000K - 5000K 6500K	80+ / 90+	305x305x65	1,45	62x32x17	4
PNSLU-020	20	110	2200				305x605x65	2,15	62x32x17	2
PNSLU-040	40	115	4600				605x605x65	3,95	61x63x17	2
PNSLU-140	40	112	4480				305x1205x65	4,05	31x122x17	2
PNSLU-080	80	108	8640				605x1205x65	6,65	62x122x17	2


DAKAR


Surfaced Mounted Panel Luminaire

SPECIFICATIONS:


Body:	DKP Metal Sheet Body Electrostatic Powder Coated
Led:	Samsung / Osram / Epistar LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic / LED&LUX Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Diffuser:	1mm Opal Diffuser High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	0°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable, Emergency










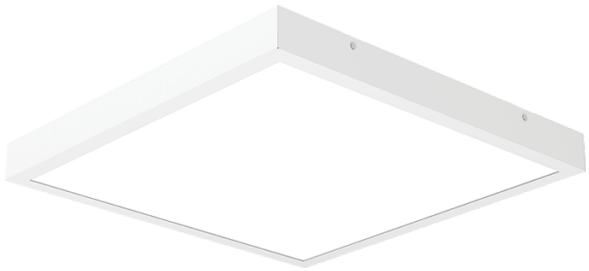

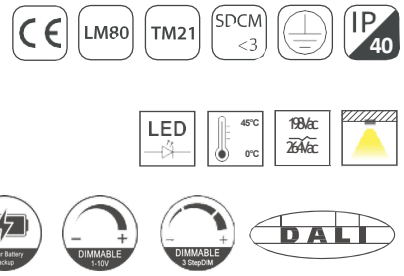


Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
PNSDK-014	14	90	1260	>0,9	2700K - 3000K 4000K - 5000K 6500K	80+	305x305x40	0,75	48x32x33	10
PNSDK-020	20	87	1740				305x605x40	1,23	32x21x63	5
PNSDK-040	40	95	3800				605x605x40	1,85	65x39x65	8
PNSDK-048	48	86	4128				605x605x40	1,85	65x39x65	8
PNSDK-140	40	92	3680				305x1205x40	2,15	32x24x123	5


AMMAN


Surface Mounted Panel Luminaire


SPECIFICATIONS:

Body:	DKP Metal Sheet Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Diffuser:	1mm Opal Diffuser High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	0°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable, Emergency












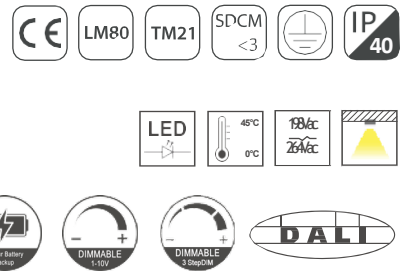



Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
PNSAN-048	48	92	4416	>0,9	2700K - 3000K 4000K - 5000K 6500K	80+ / 90+	605x605x80	5,25	61x63x17	2
PNSAN-056	56	89	4984				605x605x80	5,25	61x63x17	2
PNSAN-068	68	90	6120				605x605x80	5,42	61x63x17	2


KIEV
Surfaced Mounted Panel Luminaire

SPECIFICATIONS:

Body:	DKP Metal Sheet Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Diffuser:	1mm Opal Diffuser & 4mm Tempered Glass High Efficiency Upto 85%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	0°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable, Emergency



















Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
PNSKV-014	14	102	1428	>0,9	2700K - 3000K 4000K - 5000K 6500K	80+ / 90+	305x305x80	3,52	61x62x90	4
PNSKV-020	20	104	2080				305x605x80	4,57	61x62x90	2
PNSKV-040	40	105	4200				605x605x80	6,85	61x62x90	1
PNSKV-140	40	104	4160				305x1205x80	7,15	31x122x90	1
PNSKV-080	80	98	7840				605x1205x80	14,5	62x122x90	1

SURFACE MOUNTED LINEAR

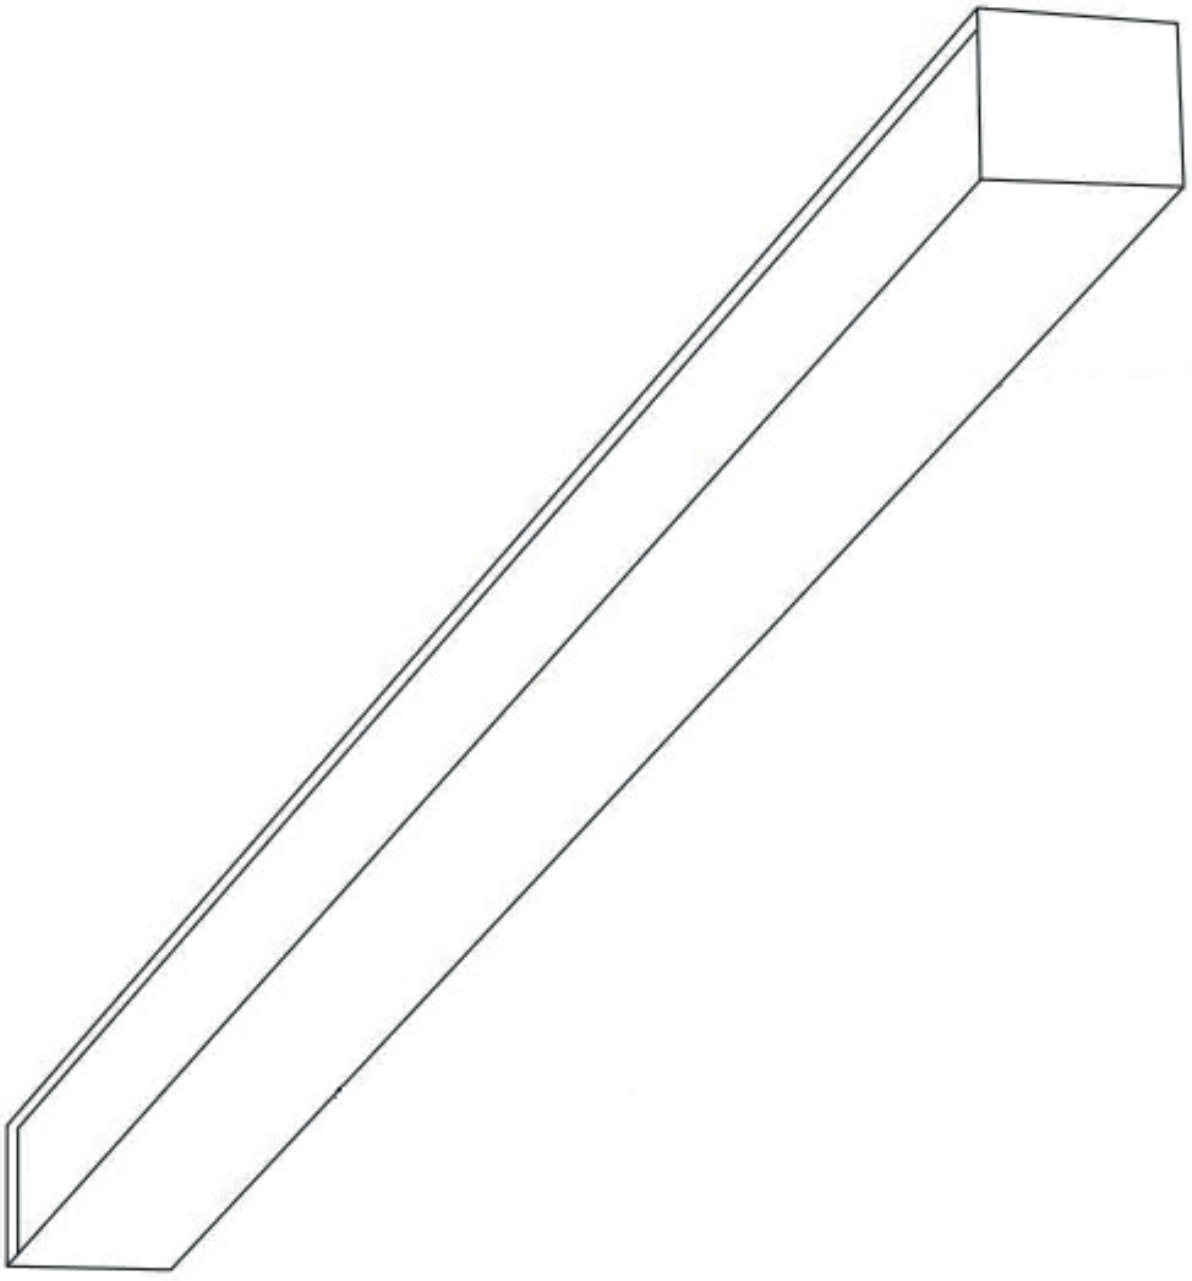



MEXICO


Surface Mounted Linear Luminaire


SPECIFICATIONS:


Body:	Aluminium Extrusion Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Diffuser:	1mm Opal Diffuser High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	0°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable, Emergency










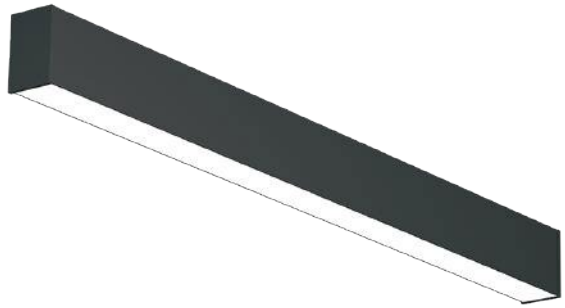








Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
LNSMX-010	10	83	830	>0,9	2700K - 3000K 4000K - 5000K 6500K	80+ / 90+	320x55x86	1,20	68x34x11	8
LNSMX-020	20	83	1660				620x55x86	1,45	68x34x11	4
LNSMX-030	30	85	2550				920x55x86	2,10	129x34x11	4
LNSMX-040	40	85	3400				1220x55x86	2,75	129x34x11	4
LNSMX-050	50	85	4250				1520x55x86	3,45	1575x7x10	1
LNSMX-060	60	83	4980				1820x55x86	4,20	1875x7x10	1


MOSCOW


Surface Mounted Linear Luminaire

SPECIFICATIONS:


Body:	Aluminium Extrusion Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Diffuser:	1mm Opal Diffuser High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	0°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable, Emergency







RAL9016 RAL9006 RAL9005

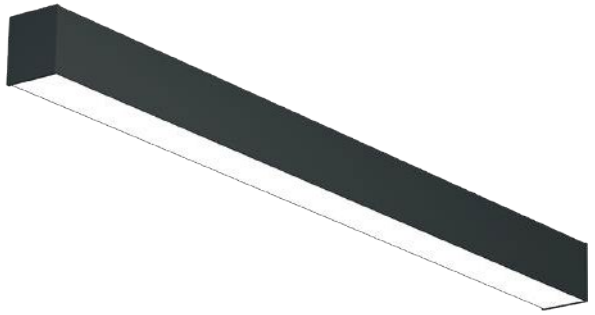


LM80 TM21 SDCM <3 IP 40

LED 45°C 0°C 198Vac 265Vac

3 Hour Battery Backup 1 Hour Battery Backup DIMMABLE 1-10V DIMMABLE 3 StepDIM DALI

Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
LNSMC-010	10	88	880	>0,9	2700K - 3000K 4000K - 5000K 6500K	80+ / 90+	320x72x65	1,32	68x34x11	8
LNSMC-020	20	90	1800				620x72x65	1,60	68x34x11	4
LNSMC-030	30	90	2700				920x72x65	2,35	129x34x11	4
LNSMC-040	40	90	3600				1220x72x65	3,12	129x34x11	4
LNSMC-050	50	90	4500				1520x72x65	3,85	1575x8x8	1
LNSMC-060	60	90	5400				1820x72x65	4,66	1875x8x8	1

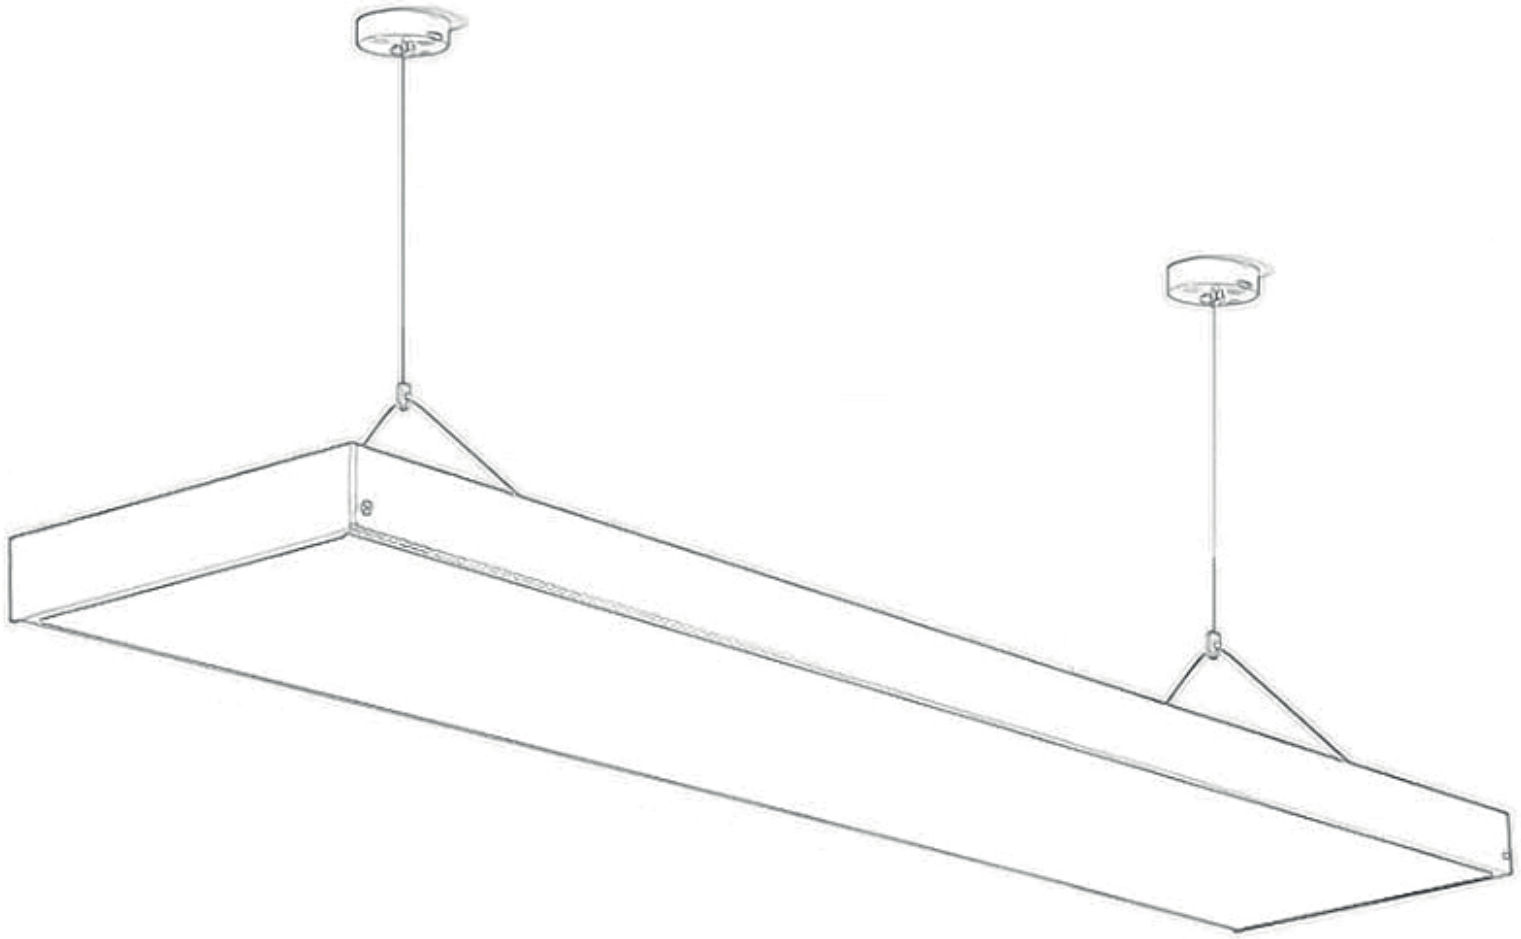


PENDENT MOUNTED LINEAR


KANO


Pendant Mounted Linear Luminaire

SPECIFICATIONS:


Body:	DKP Metal Sheet Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Diffuser:	1mm Opal Diffuser High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	0°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable, Emergency










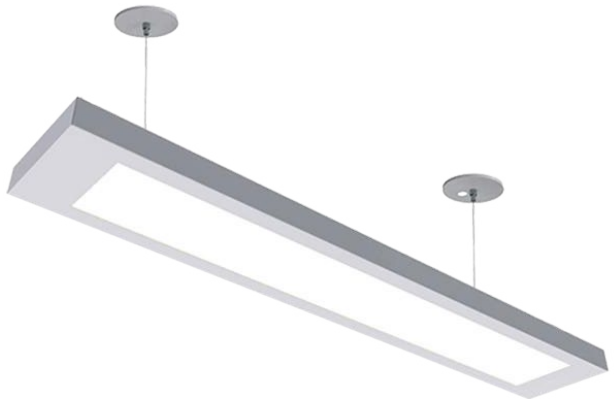

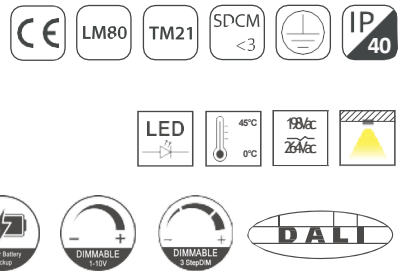


Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
LNPKA-032	32	105	3360	>0,9	2700K - 3000K 4000K - 5000K 6500K	80+ / 90+	620x120x50	3,22	62x20x11	2
LNPKA-040	40	103	4120				620x200x50	3,35	62x20x11	2
LNPKA-132	32	105	3360				1220x120x50	4,25	124x20x11	2
LNPKA-140	40	103	4120				1220x120x50	4,25	124x20x11	2
LNPKA-150	50	103	5150				1220x120x50	4,25	124x20x11	2
LNPKA-160	60	103	6180				1220x120x50	4,55	124x20x11	2


FRANKFURT


Pendant Mounted Linear Luminaire

SPECIFICATIONS:


Body:	Aluminium Extrusion Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Diffuser:	1mm Opal Diffuser High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	0°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable, Emergency










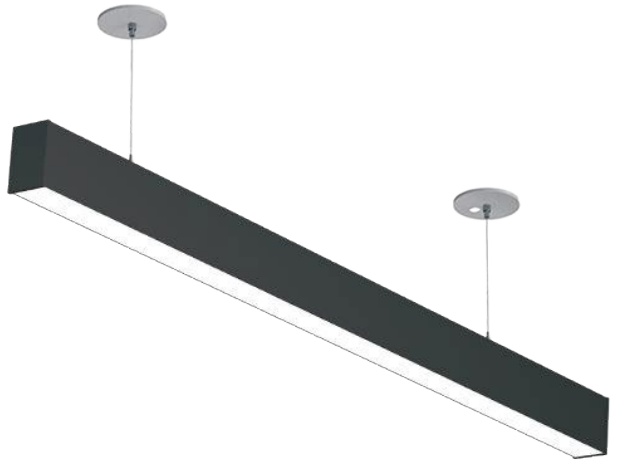

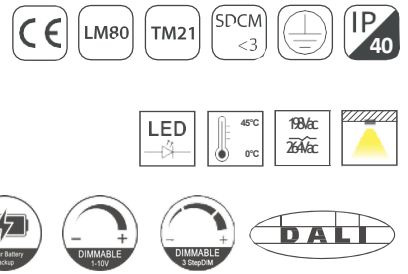


Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
LNPFF-010	10	83	830	>0,9	2700K - 3000K 4000K - 5000K 6500K	80+ / 90+	320x55x86	1,20	68x34x11	8
LNPFF-020	20	83	1660				620x55x86	1,45	68x34x11	4
LNPFF-030	30	85	2550				920x55x86	2,10	129x34x11	4
LNPFF-040	40	85	3400				1220x55x86	2,75	129x34x11	4
LNPFF-050	50	85	4250				1520x55x86	3,45	1575x7x10	1
LNPFF-060	60	83	4980				1820x55x86	4,20	1875x7x10	1


TAMPA


Pendant Mounted Linear Luminaire

SPECIFICATIONS:


Body:	Aluminium Extrusion Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Diffuser:	1mm Opal Diffuser High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	0°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable, Emergency










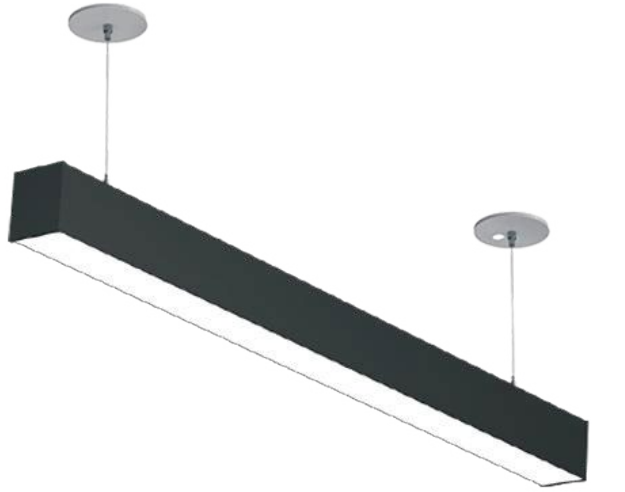








Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
LNPTM-010	10	88	880	>0,9	2700K - 3000K 4000K - 5000K 6500K	80+ / 90+	320x72x65	1,32	68x34x11	8
LNPTM-020	20	90	1800				620x72x65	1,60	68x34x11	4
LNPTM-030	30	90	2700				920x72x65	2,35	129x34x11	4
LNPTM-040	40	90	3600				1220x72x65	3,12	129x34x11	4
LNPTM-050	50	90	4500				1520x72x65	3,85	1575x8x8	1

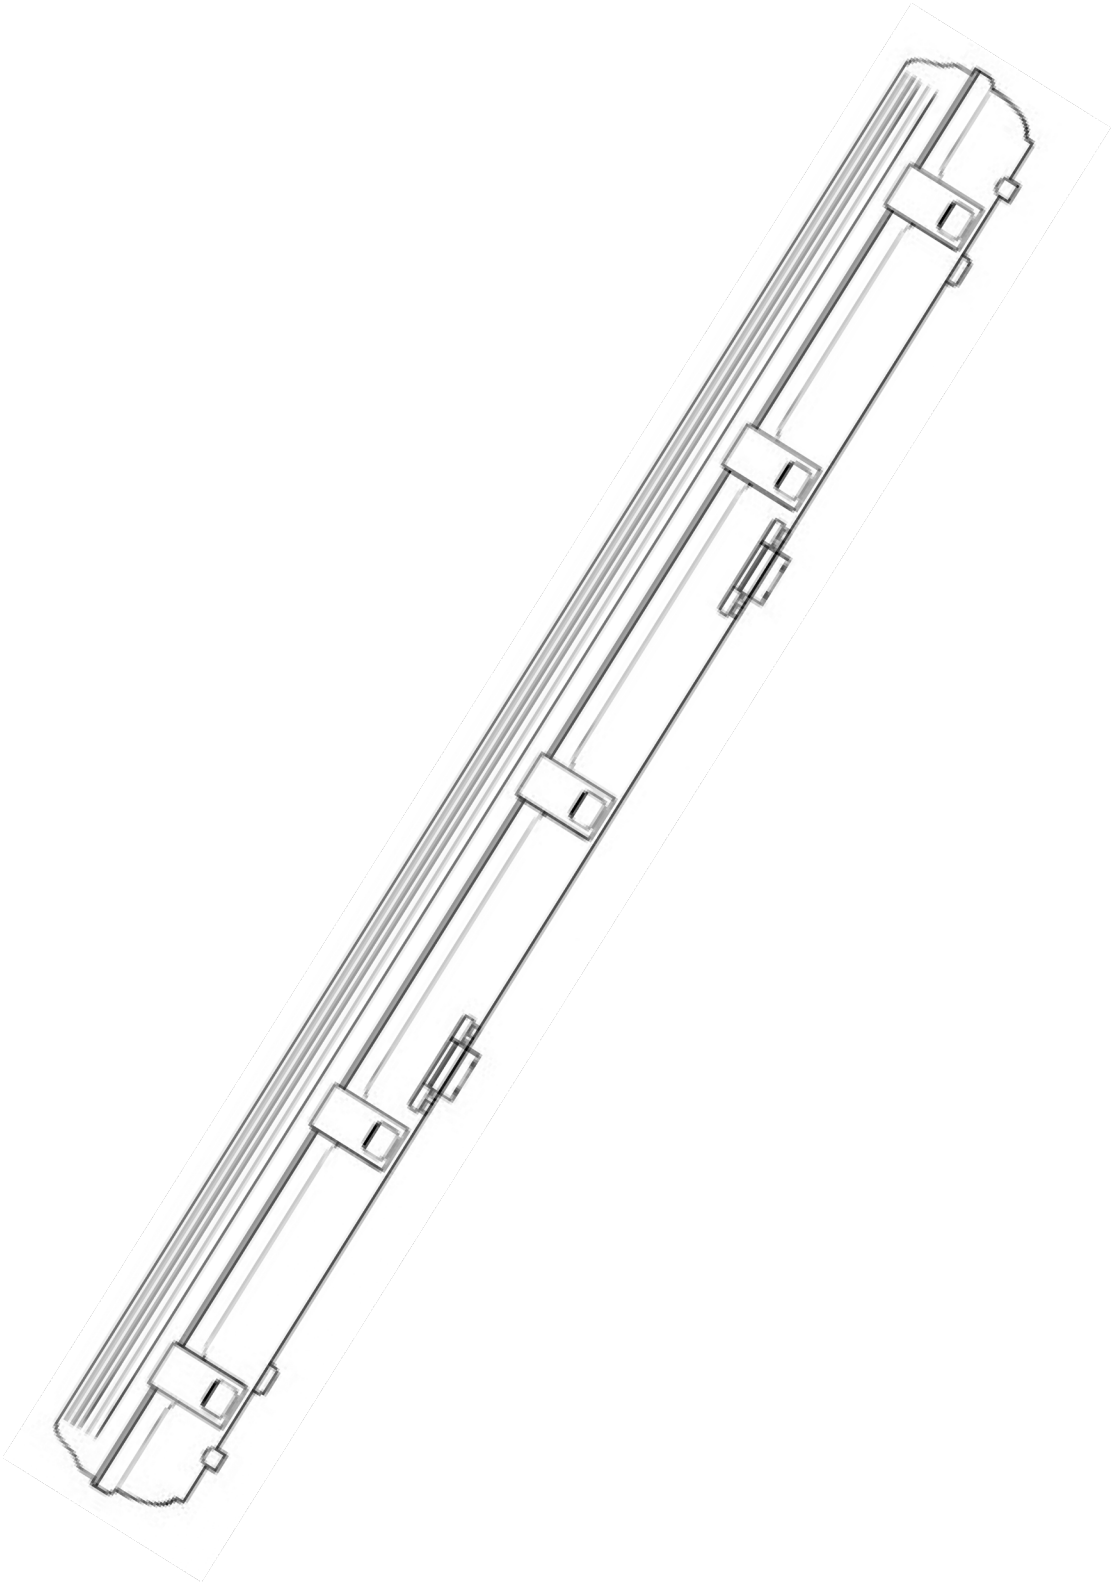


SURFACE MOUNTED WATERPROOF


TUNIS


Surfaced Mounted Waterproof Luminaire

SPECIFICATIONS:

Body:	Polycarbonate Injection Body
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Diffuser:	Polycarbonate Diffuser High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	-5°C — +40°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable, Emergency







RAL9016 RAL9006 RAL9005



LM80 TM21 SDCM <3 IP65

LED 40°C -5°C 198Vac 264Vac

DIMMABLE 1-10V DIMMABLE 3 StepDIM DALI


Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
WPSTN-60015	15	123	1845	>0,9	2700K - 3000K 4000K - 5000K 6500K	80+ / 90+	670x130x90	1,55	68x32x11	2
WPSTN-60020	20	118	2360				670x130x90	1,55	68x32x11	2
WPSTN-60024	24	115	2760				670x130x90	1,55	68x32x11	2
WPSTN-12032	32	123	3936				1285x130x90	2,35	129x32x11	2
WPSTN-12040	40	120	4800				1285x130x90	2,35	129x32x11	2
WPSTN-12048	48	118	5664				1285x130x90	2,35	129x32x11	2


HAVANA


Surfaced Mounted Waterproof Luminaire

SPECIFICATIONS:

Body:	Policarbonate Injection Body
Led:	Samsung / Osram / Epistar LED Chip LM80 - 50.000 Hours Life Span
Driver:	Non-Isolated LED&LUX Driver Constant Current - Efficiency >85% THD<25% - 30.000 Hours Life Span
Diffuser:	Polycarbonate Transparent Diffuser High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	-5°C — +40°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable, Emergency



















Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
WPSHV-60009	1x9	90	810	>0,5	3000K - 4000K 6500K	80+	670x130x90	1,55	68x32x11	2
WPSHV-60018	2x9	90	1620				670x130x90	1,55	68x32x11	2
WPSHV-12018	1x18	90	1620				1285x130x90	2,35	129x32x11	2
WPSHV-12036	2x18	90	3240				1285x130x90	2,35	129x32x11	2
WPSHV-15024	1x24	90	2160				1585x130x90	2,85	159x32x11	2
WPSHV-15048	2x24	90	4320				1585x130x90	2,85	159x32x11	2


COLOMBO


Surfaced Mounted Waterproof Luminaire

SPECIFICATIONS:

Body:	Polycarbonate Extrusion Body
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Diffuser:	Polycarbonate Diffuser High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	-5°C — +40°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable, Emergency












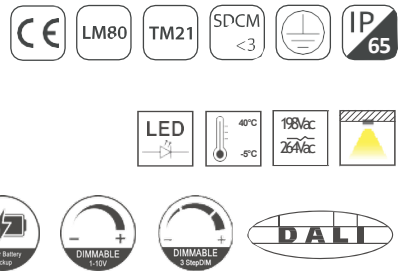


Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
WPSCO-30010	10	121	1210	>0,9	2700K - 3000K 4000K - 5000K 6500K	80+ / 90+	320x75x81	0,90	68x32x11	8
WPSCO-60020	20	119	2380				620x75x81	1,20	68x32x11	8
WPSCO-90030	30	123	3690				920x75x81	1,35	129x32x11	4
WPSCO-12032	32	131	4192				1220x75x81	1,65	129x32x11	4
WPSCO-12040	40	124	4960				1220x75x81	1,65	129x32x11	4
WPSCO-12045	48	118	5664				1220x75x81	1,65	129x32x11	4


WARSAW


Surfaced Mounted Waterproof Luminaire

SPECIFICATIONS:

Body:	Polycarbonate Extrusion Body
Led:	Samsung / Osram / Epistar LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic / LED&LUX Driver Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Diffuser:	Polycarbonate Diffuser High Efficiency Upto 80%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	-5°C — +40°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable, Emergency












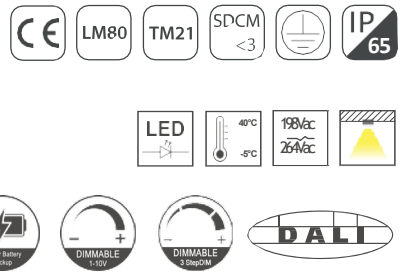


Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
WPSWR-30010	10	112	1120	>0,9	2700K - 3000K 4000K - 5000K 6500K	80+ / 90+	310x44x64	0,40	68x32x11	4
WPSWR-60018	18	108	1944				610x44x64	0,60	68x32x11	4
WPSWR-90028	28	115	3220				910x44x64	0,80	129x32x11	4
WPSWR-12036	36	112	4032				1210x44x64	0,95	129x32x11	4


ZIBO


Surfaced Mounted Waterproof Luminaire

SPECIFICATIONS:


Body:	Aluminium Extrusion Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Diffuser:	Polycarbonate Diffuser High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	-5°C — +40°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable, Emergency







RAL9016 RAL9006 RAL9005

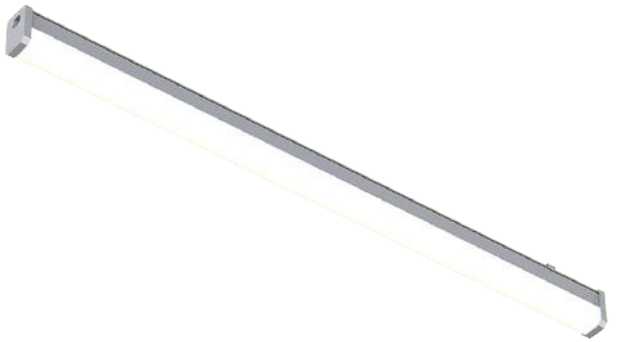

LM80 TM21 SDCM <3 IP 65

LED 40°C -5°C 198Vac 264Vac

3 Hour Battery Backup · 1 Hour Battery Backup · DIMMABLE 1-10V · DIMMABLE 3 StepDIM · DALI


Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
WPSZB-30010	10	121	1210	>0,9	2700K - 3000K 4000K - 5000K 6500K	80+ / 90+	320x72x51	1,05	68x32x11	8
WPSZB-60020	20	120	2400				620x72x51	1,30	68x32x11	4
WPSZB-90030	30	121	3630				920x72x51	1,55	129x32x11	4
WPSZB-12032	32	125	4000				1220x72x51	1,70	129x32x11	4
WPSZB-12040	40	120	4800				1220x72x51	1,70	129x32x11	4
WPSZB-12045	48	117	5616				1220x72x51	1,75	129x32x11	4


GIZA


Surfaced Mounted Waterproof Luminaire

SPECIFICATIONS:


Body:	Alumuminium Extrusion Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Diffuser:	Polycarbonate High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	-5°C — +40°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable, Emergency










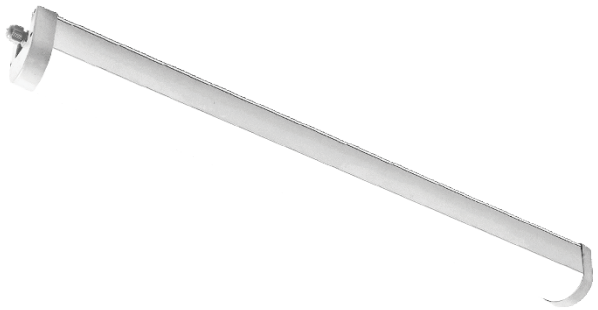











Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
WPSGZ-30010	10	121	1210	>0,9	2700K - 3000K 4000K - 5000K 6500K	80+ / 90+	320x55x60	1,05	68x32x11	8
WPSGZ-60020	20	120	2400				620x55x60	1,30	68x32x11	4
WPSGZ-90030	30	121	3630				920x55x60	1,55	129x32x11	4
WPSGZ-12032	32	125	4000				1220x55x60	1,70	129x32x11	4
WPSGZ-12040	40	120	4800				1220x55x60	1,70	129x32x11	4
WPSGZ-12045	48	117	5616				1220x55x60	1,75	129x32x11	4

LOW & HIGH BAY FIXTURE

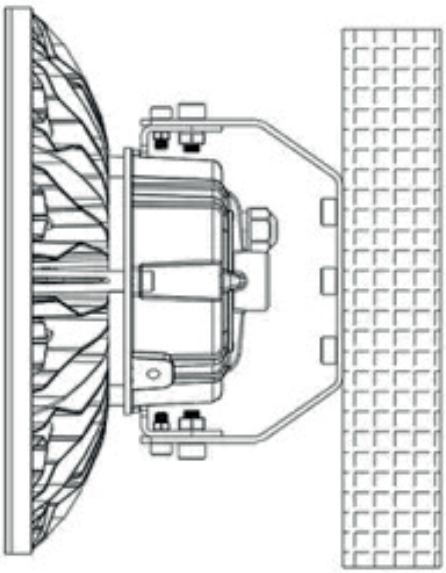

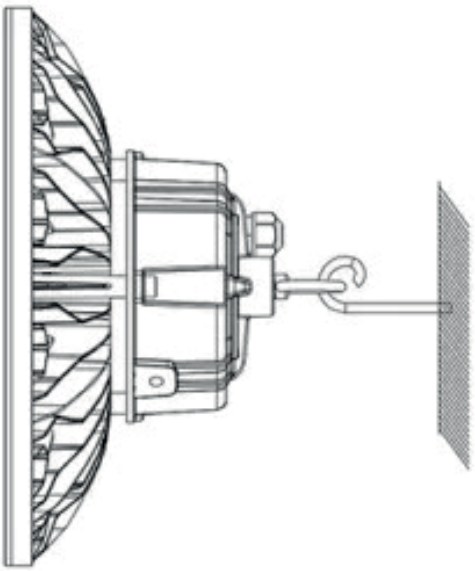

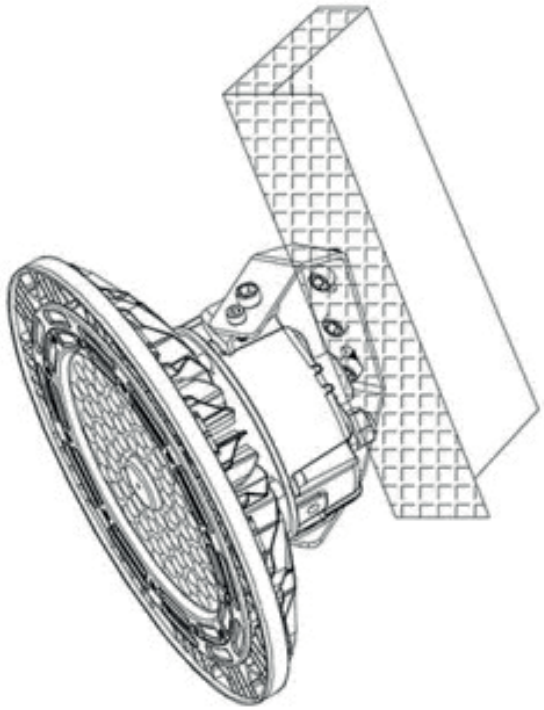

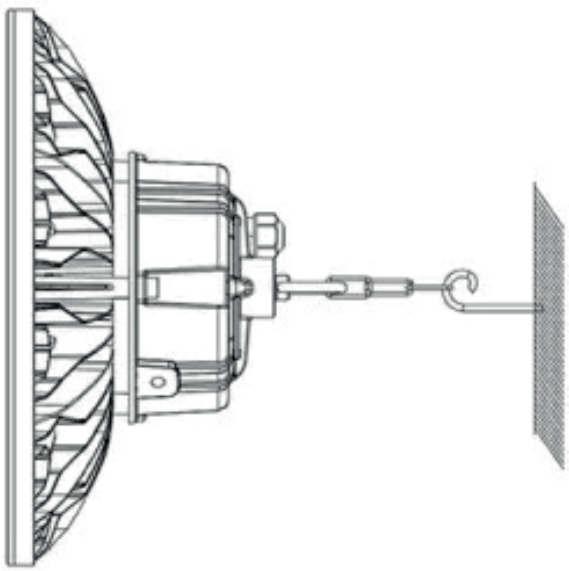



INDORE


Low & High Bay Luminaire

SPECIFICATIONS:

Body:	Aluminium Injection Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Lens:	PMMA Lens / 4mm Tempered Glass High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	-10˚C — +45˚C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable







RAL9016 RAL9006 RAL9005



LM80 TM21 SDCM <3 IP 65

LED 45°C -10°C 198Vac 264Vac


DIMMABLE 1-10V DIMMABLE 3 StepDIM DALI


Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
HBRIN-060	60	135	8100	>0,9	2700K - 3000K 4000K - 5000K 6500K	80+ / 90+	282x282x100	2,25	300x300x150	1
HBRIN-075	75	131	9825				282x282x100	2,45	300x300x150	1
HBRIN-100	100	125	12500				282x282x100	2,45	300x300x150	1


BAKU
Low & High Bay Luminaire

SPECIFICATIONS:

Body:	Aluminium Injection Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic / Meanwell Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Lens:	PMMA Lens High Efficiency Upto 95%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	-10°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable









RAL9016 RAL9006 RAL9005

LM80 TM21 SDCM <3 IP65


LED 45°C -10°C 198Vac 264Vac


DIMMABLE 1-10V DIMMABLE 3 StepDIM DALI


Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
HBRBK-120	120	125	15000	>0,9	2700K - 3000K 4000K - 5000K 6500K	80+ / 90+	350x350x156	2,80	370x370x180	1
HBRBK-150	150	123	18450				350x350x156	2,80	370x370x180	1
HBRBK-180	180	120	21600				350x350x156	3,10	370x370x180	1
HBRBK-200	200	118	23600				350x350x156	3,10	370x370x180	1

SPECIFICATIONS:

Body:	Aluminium Injection Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic / Meanwell Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Lens:	PMMA Lens / 4mm Tempered Glass High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	-10°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable













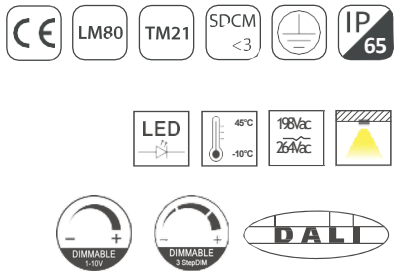



Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
HBSNG-075	75	135	10125	>0,9	2700K - 3000K 4000K - 5000K 6500K	80+ / 90+	335x335x150	4,15	350x350x160	1
HBSNG-100	100	132	13200				335x335x150	4,15	350x350x160	1
HBSNG-125	125	128	16000				335x335x150	4,35	350x350x160	1
HBSNG-150	150	124	18600				335x335x150	4,35	350x350x160	1


SPECIFICATIONS:

Body:	Aluminium Injection Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic / Meanwell Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Lens:	PMMA Lens / 4mm Tempered Glass High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	-10°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable













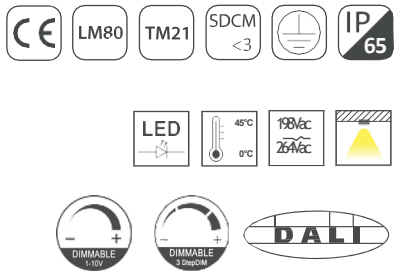



Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
HBSDR-240	240	112	26880	>0,9	2700K - 3000K 4000K - 5000K 6500K	80+ / 90+	507x224x195	8,4	520x240x610	3
HBSDR-260	260	110	28600				507x224x195	8,4	520x240x610	3
HBSDR-280	280	108	30240				507x224x195	8,75	520x240x610	3
HBSDR-320	320	105	33600				507x224x195	8,75	520x240x610	3

SPECIFICATIONS:


Body:	Aluminium Extrusion Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Lens:	PMMA Lens High Efficiency Upto 95%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	-10°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable, Emergency









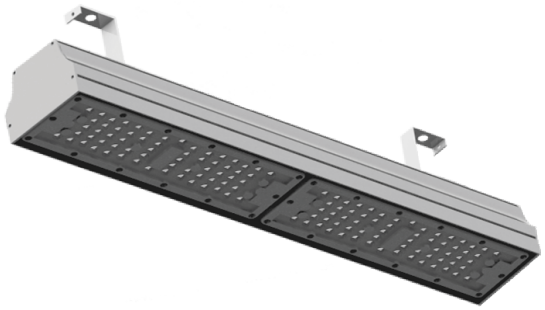





Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
HBLHM-80	80	125	10000	>0,9	2700K - 3000K 4000K - 5000K 6500K	80+ / 90+	500x83x63	2,80	100x18x7	4
HBLHM-120	120	125	15000				750x83x63	4,20	100x18x7	2
HBLHM-120M	120	124	14880				250x250x63	4,35	100x26x7	3
HBLHM-160	160	124	19840				1000x83x63	5,35	100x18x7	2
HBLHM-160M	160	124	19840				500x170x63	5,42	100x18x7	2
HBLHM-200	200	121	24200				1250x83x63	6,65	1500x18x7	2


SANTA
Low & High Bay Luminaire

SPECIFICATIONS:


Body:	Aluminium Extrusion Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Lens:	PMMA Lens / 4mm Tempered Glass High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	-5°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable, Emergency







RAL9016 RAL9006 RAL9005

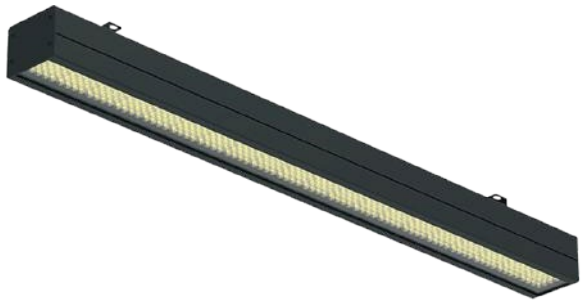

LM80 TM21 SDCM <3 IP 65


LED 45°C -5°C 198Vac 264Vac


3 Hour Battery Backup · 1 Hour Battery Backup · DIMMABLE 1-10V · DIMMABLE 3 StepDIM · DALI


Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
HBLSN-075	75	122	9150	>0,9	2700K - 3000K 4000K - 5000K 6500K	80+ / 90+	650x95x104	2,9	675x320x225	6
HBLSN-100	100	121	12100				850x95x104	3,5	875x320x225	6
HBLSN-125	125	123	15375				950x95x104	4,2	975x320x225	6
HBLSN-150	150	120	18000				1250x95x104	4,8	1275x320x225	4

SPECIFICATIONS:

Body:	Aluminium Extrusion Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Lens:	PMMA Lens / 4mm Tempered Glass High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	-5°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable, Emergency













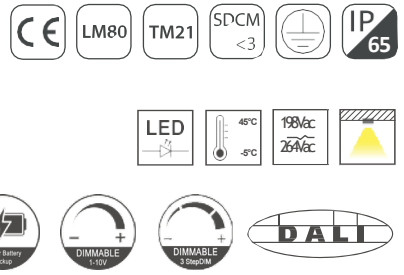

Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
HBLYB-075	75	132	9900	>0,9	2700K - 3000K 4000K - 5000K 6500K	80+ / 90+	500x195x132	3,6	520x210x700	5
HBLYB-100	100	130	13000				650x195x132	4,5	670x210x700	5
HBLYB-125	125	130	16250				800x195x132	5,6	820x210x550	4
HBLYB-150	150	128	19200				950x195x132	6,5	970x195x550	4
HBLYB-200	200	128	25600				1250x195x132	8,2	1270x195x410	3

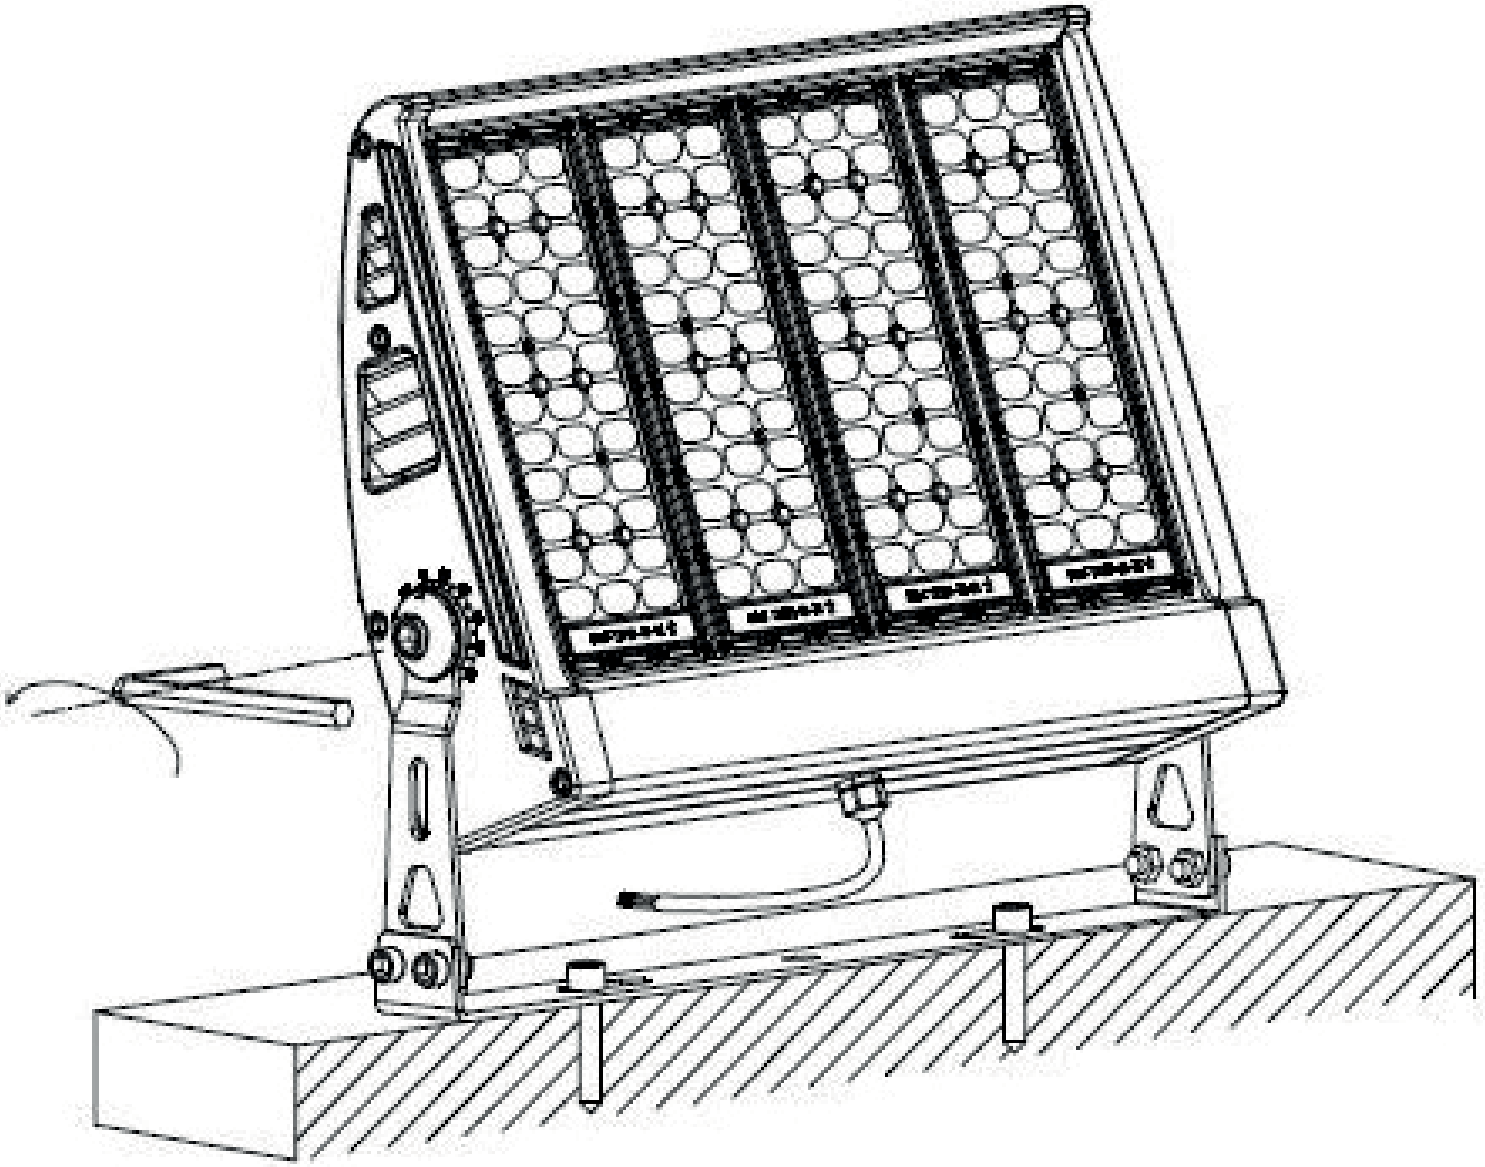



FLOODLIGHT FIXTURE


TABRIZ
Floodlight Luminaire

SPECIFICATIONS:

Body:	Aluminium Injection Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
LENS:	PMMA LENS / 4mm Tempered Glass High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	-10°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable




















Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
FLSTB-050	50	128	6400	>0,9	2700K - 3000K 4000K - 5000K 6500K	70+ / 80+	330x278x65	2,50	350x290x75	1
FLSTB-060	60	127	7620				330x278x65	2,50	350x290x75	1
FLSTB-080	80	125	10000				330x278x65	2,80	350x290x75	1
FLSTB-100	100	121	12100				330x278x65	2,80	350x290x75	1


HAMBURG
Floodlight Luminaire

SPECIFICATIONS:

Body:	Aluminium Injection Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
LENS:	PMMA LENS / 4mm Tempered Glass High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	-10°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable







RAL9016 RAL9006 RAL9005



LM80 TM21 SDCM <3 IP 66

LED 45°C -10°C 198Vac 264Vac


DIMMABLE 1-10V DIMMABLE 3 StepDIM DALI


Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
FLSHM-120	120	127	15240	>0,9	2700K - 3000K 4000K - 5000K 6500K	70+ / 80+	420x380x65	3,50	435x400x75	1
FLSHM-150	150	125	18750				420x380x65	3,50	435x400x75	1
FLSHM-180	180	124	22320				420x380x65	3,95	435x400x75	1
FLSHM-200	200	120	24000				420x380x65	3,95	435x400x75	1


BUDAPEST
Floodlight Luminaire

SPECIFICATIONS:

Body:	Aluminium Injection Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
LENS:	PMMA LENS / 4mm Tempered Glass High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	-10°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable







RAL9016 RAL9006 RAL9005



LM80 TM21 SDCM <3 IP 66

LED 45°C -10°C 198Vac 264Vac


DIMMABLE 1-10V DIMMABLE 3 StepDIM DALI


Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
FLSBD-060	60	132	7920	>0,9	2700K - 3000K 4000K - 5000K 6500K	70+ / 80+	340x340x64	2,50	350x350x75	1
FLSBD-080	80	128	10240				340x340x64	2,50	350x350x75	1
FLSBD-100	100	125	12500				340x340x64	2,90	350x350x75	1
FLSBD-120	120	112	13440				340x340x64	2,95	350x350x75	1
FLSBD-140	140	128	17920				340x340x64	3,20	350x350x75	1


VIENNA
Floodlight Luminaire

SPECIFICATIONS:

Body:	Aluminium Injection Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
LENS:	PMMA LENS / 4mm Tempered Glass High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	-10°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable





















Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
FLSVN-050	50	130	6500	>0,9	2700K - 3000K 4000K - 5000K 6500K	70+ / 80+	250x170x46	1,80	550x250x200	10
FLSVN-060	60	125	7500				250x170x46	1,80	550x250x200	10
FLSVN-075	75	122	9150				250x170x46	1,80	550x250x200	10

SPECIFICATIONS:

Body:	Aluminium Injection Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
LENS:	PMMA LENS / 4mm Tempered Glass High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	-10°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable




















Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
FLSRG-100	100	130	13000	>0,9	2700K - 3000K 4000K - 5000K 6500K	70+ / 80+	386x320x65	4,40	390x335x290	4
FLSRG-125	125	125	15625				386x320x65	4,40	390x335x290	4
FLSRG-150	150	122	18300				386x320x65	4,40	390x335x290	4
FLSRG-200	200	118	23600				421x360x65	5,30	435x380x290	4


AGRA
Floodlight Luminaire

SPECIFICATIONS:

Body:	Aluminium Injection Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
LENS:	PMMA LENS / 4mm Tempered Glass High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	-10°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable







RAL9016 RAL9006 RAL9005



LM80 TM21 SDCM <3 IP 66

LED 45°C -10°C 198Vac 264Vac


DIMMABLE 1-10V DIMMABLE 3 StepDIM DALI


Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
FLRAG-050	50	130	6500	>0,9	2700K - 3000K 4000K - 5000K 6500K	70+ / 80+	319x290x171	2,80	700x360x365	4
FLRAG-060	60	130	7800				319x290x171	2,80	700x360x365	4
FLRAG-075	75	125	9375				319x290x171	2,80	700x360x365	4
FLRAG-085	85	125	10625				319x290x171	2,80	700x360x365	4
FLRAG-100	100	120	12000				319x290x171	2,90	700x360x365	4


TASHKENT
Floodlight Luminaire

SPECIFICATIONS:

Body:	Aluminium Injection Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
LENS:	PMMA LENS / 4mm Tempered Glass High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	-10°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable







RAL9016 RAL9006 RAL9005



LM80 TM21 SDCM <3 IP 66

LED 45°C -10°C 198Vac 264Vac


DIMMABLE 1-10V DIMMABLE 3 StepDIM DALI


Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
FLSTK-300	300	125	37500	>0,9	2700K - 3000K 4000K - 5000K 6500K	70+ / 80+	507x438x217	15,00	520x450x225	1
FLSTK-350	350	122	42700				507x438x217	15,00	520x450x225	1
FLSTK-400	400	118	47200				507x438x217	16,50	520x450x225	1
FLSTK-500	500	112	56000				507x438x217	16,50	520x450x225	1


BURSA
Floodlight Luminaire

SPECIFICATIONS:

Body:	Aluminium Injection Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
LENS:	PMMA LENS / 4mm Tempered Glass High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	-10°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable







RAL9016 RAL9006 RAL9005



LM80 TM21 SDCM <3 IP 66

LED 45°C -10°C 198Vac 264Vac


DIMMABLE 1-10V DIMMABLE 3 StepDIM DALI


Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
FLSBR-300	300	120	36000	>0,9	2700K - 3000K 4000K - 5000K 6500K	70+ / 80+	332x554x215	12,00	340x570x230	1
FLSBRS-400	400	115	46000				332x554x215	12,00	340x570x230	1
FLSBRS-450	450	111	49950				332x554x215	12,50	340x570x230	1
FLSBRS-500	500	108	54000				332x554x215	12,50	340x570x230	1


BURSA-II
Floodlight Luminaire

SPECIFICATIONS:

Body:	Aluminium Injection Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
LENS:	PMMA LENS / 4mm Tempered Glass High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	-10°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable







RAL9016 RAL9006 RAL9005





LM80 TM21 SDCM <3 IP 66


LED 45°C -10°C 198Vac 264Vac


DIMMABLE 1-10V DIMMABLE 3 StepDIM DALI

Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
FLSBR-750	750	130	97500	>0,9	2700K - 3000K 4000K - 5000K 6500K	70+ / 80+	607x554x285	24,00	630x560x300	1
FLSBR-800	800	125	100000				607x554x285	24,00	630x560x300	1
FLSBR-900	900	115	103500				607x554x285	25,00	630x560x300	1
FLSBR-1000	1000	105	105000				607x554x285	25,00	630x560x300	1

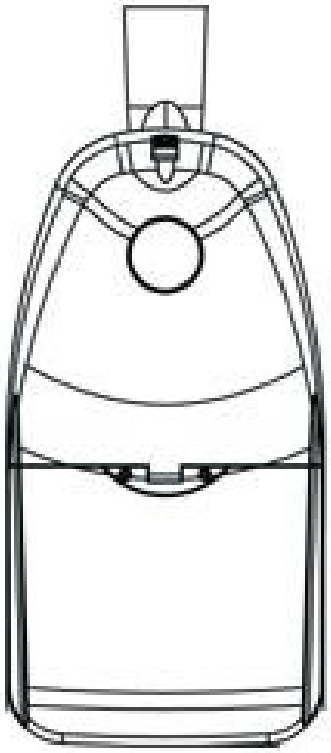

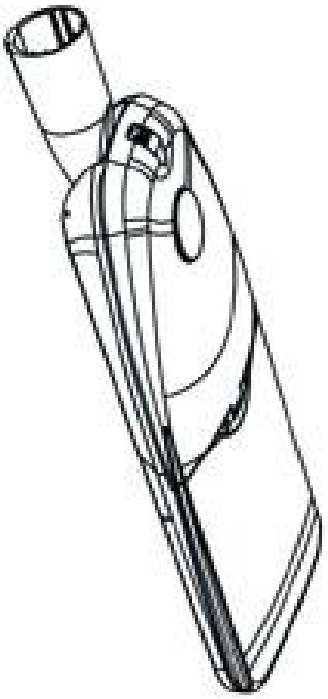

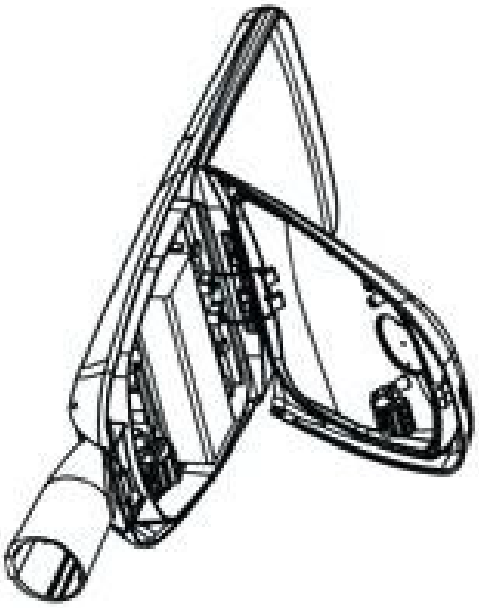

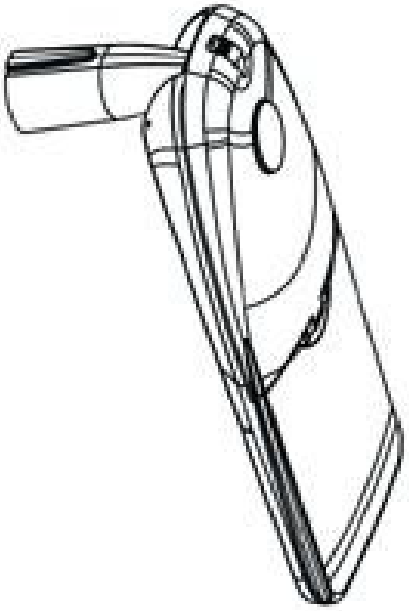



STREETLIGHT FIXTURE


LUSAKA
Streetlight Luminaire

SPECIFICATIONS:

Body:	Aluminium Injection Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic / Meanwell Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Diffuser:	PMMA Lens High Efficiency Upto 95%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	-10°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable







RAL9016 RAL9006 RAL9005



LM80 TM21 SDCM <3 IP65

LED 45°C -10°C 198Vac 264Vac


DIMMABLE 1-10V DIMMABLE 3 StepDIM DALI


Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
STPLS-025	25	130	3250	>0,9	2700K - 3000K 4000K - 5000K 6500K	80+ / 90+	372x212x67	2,20	560x240x430	6
STPLS-035	35	125	4375				372x212x67	2,20	560x240x430	6
STPLS-050	50	120	6000				372x212x67	2,30	560x240x430	6
STPLS-060	60	120	7200				372x212x67	2,30	560x240x430	6


CALGARY
Streetlight Luminaire

SPECIFICATIONS:

Body:	Aluminium Injection Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic / Meanwell Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Diffuser:	4mm Tempered Glass / PMMA Lens High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	-10°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable







RAL9016 RAL9006 RAL9005



LM80 TM21 SDCM <3 IP 66

LED 45°C -10°C 198Vac 264Vac


DIMMABLE 1-10V DIMMABLE 3 StepDIM DALI


Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
STPCG-030	30	125	3750	>0,9	2700K - 3000K 4000K - 5000K 6500K	70+ / 80+	261x150x56	1,25	470x240x160	12
STPCG-040	40	120	4800				261x150x56	1,25	470x240x160	12
STPCG-050	50	118	5900				261x150x56	1,35	470x240x160	12
STPCG-060	60	118	7080				261x150x56	1,35	470x240x160	12


MULTAN
Streetlight Luminaire

SPECIFICATIONS:

Body:	Aluminium Injection Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic / Meanwell Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Diffuser:	4mm Tempered Glass / PMMA Lens High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	-10°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable







RAL9016 RAL9006 RAL9005



LM80 TM21 SDCM <3 IP 66

LED 45°C -10°C 198Vac 264Vac


DIMMABLE 1-10V DIMMABLE 3 StepDIM DALI


Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
STPML-060	60	130	7800	>0,9	2700K - 3000K 4000K - 5000K 6500K	70+ / 80+	485x266x102	4,70	510x280x110	1
STPML-080	80	126	10080				485x266x102	4,70	510x280x110	1
STPML-100	100	122	12200				485x266x102	4,70	510x280x110	1
STPML-120	120	117	14040				485x266x102	4,95	510x280x110	1


BRUSSELS
Streetlight Luminaire

SPECIFICATIONS:

Body:	Aluminium Injection Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic / Meanwell Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Diffuser:	4mm Tempered Glass / PMMA Lens High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	-10°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable







RAL9016 RAL9006 RAL9005



LM80 TM21 SDCM <3 IP 66

LED 45°C -10°C 198Vac 264Vac


DIMMABLE 1-10V DIMMABLE 3 StepDIM DALI


Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
STPBR-100	100	118	11800	>0,9	2700K - 3000K 4000K - 5000K 6500K	70+ / 80+	438x205x67	3,50	460x300x220	4
STPBR-125	125	118	14750				438x205x67	4,00	520x300x280	4
STPBR-150	150	118	17700				438x205x67	4,00	520x300x280	4


DUBLIN
Streetlight Luminaire

SPECIFICATIONS:

Body:	Aluminium Injection Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic / Meanwell Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Diffuser:	4mm Tempered Glass / PMMA Lens High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	-10°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable







RAL9016 RAL9006 RAL9005



LM80 TM21 SDCM <3 IP 66

LED 45°C -10°C 198Vac 264Vac


DIMMABLE 1-10V DIMMABLE 3 StepDIM DALI


Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
STPDB-100	100	120	12000	>0,9	2700K - 3000K 4000K - 5000K 6500K	70+ / 80+	679x292x68	5,70	735x310x360	4
STPDB-125	125	118	14750				679x292x68	6,20	735x310x360	4
STPDB-150	150	115	17250				679x292x68	6,20	735x310x360	4


KALYAN
Streetlight Luminaire

SPECIFICATIONS:

Body:	Aluminium Injection Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic / Meanwell Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Diffuser:	4mm Tempered Glass / PMMA Lens High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	-10°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable







RAL9016 RAL9006 RAL9005



LM80 TM21 SDCM <3 IP 66

LED 45°C -10°C 198Vac 264Vac


DIMMABLE 1-10V DIMMABLE 3 StepDIM DALI


Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
STPKL-040	40	125	5000	>0,9	2700K - 3000K 4000K - 5000K 6500K	70+ / 80+	420x280x80	3,20	435x300x95	1
STPKL-060	60	122	7320				420x280x80	3,50	435x300x95	1
STPKL-080	80	120	9600				420x280x80	3,50	435x300x95	1
STPKL-100	100	117	11700				420x280x80	3,50	435x300x95	1


PRAGUE
Streetlight Luminaire

SPECIFICATIONS:

Body:	Aluminium Injection Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic / Meanwell Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Diffuser:	4mm Tempered Glass / PMMA Lens High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	-10°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable












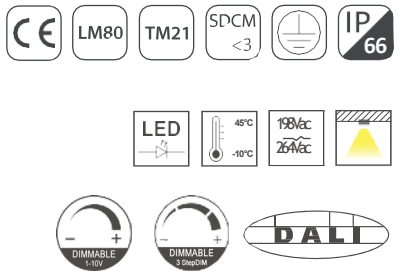



Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
STPPR-100	100	122	12200	>0,9	2700K - 3000K 4000K - 5000K 6500K	70+ / 80+	500x298x103	4,80	520x320x110	1
STPPR-120	120	119	14280				500x298x103	4,80	520x320x110	1
STPPR-140	140	117	16380				500x298x103	4,80	520x320x110	1
STPPR-160	160	114	18240				500x298x103	5,50	520x320x110	1


SOFIA
Streetlight Luminaire

SPECIFICATIONS:

Body:	Aluminium Injection Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic / Meanwell Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Diffuser:	4mm Tempered Glass / PMMA Lens High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	-10°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable







RAL9016 RAL9006 RAL9005



LM80 TM21 SDCM <3 IP 66

LED 45°C -10°C 198Vac 264Vac


DIMMABLE 1-10V DIMMABLE 3 StepDIM DALI


Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
STPSF-180	180	125	22500	>0,9	2700K - 3000K 4000K - 5000K 6500K	70+ / 80+	610x357x106	7,80	625x375x115	1
STPSF-200	200	121	24200				610x357x106	7,80	625x375x115	1
STPSF-220	220	118	25960				610x357x106	8,40	625x375x115	1
STPSF-240	240	115	27600				610x357x106	8,40	625x375x115	1


VALENCIA
Streetlight Luminaire

SPECIFICATIONS:

Body:	Aluminium Injection Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic / Meanwell Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Diffuser:	4mm Tempered Glass / PMMA Lens High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	-10°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable







RAL9016 RAL9006 RAL9005



LM80 TM21 SDCM <3 IP 66

LED 45°C -10°C 198Vac 264Vac


DIMMABLE 1-10V DIMMABLE 3 StepDIM DALI


Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
STPVL-060	60	130	7800	>0,9	2700K - 3000K 4000K - 5000K 6500K	70+ / 80+	290x530x90	5,50	320x550x100	1
STPVL-075	75	130	9750				290x530x90	5,50	320x550x100	1
STPVL-100	100	125	12500				290x530x90	5,50	320x550x100	1
STPVL-125	125	125	15625				290x530x90	6,20	320x550x100	1
STPVL-150	150	120	18000				290x530x90	6,20	320x550x100	1
STPVL-180	180	125	22500				290x665x90	7,50	320x690x100	1
STPVL-220	220	118	25960				290x665x90	7,50	320x690x100	1
STPVL-240	240	115	27600				290x665x90	7,80	320x690x100	1


ODESSA
Streetlight Luminaire

SPECIFICATIONS:

Body:	Aluminium Injection Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic / Meanwell Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Diffuser:	4mm Tempered Glass / PMMA Lens High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	-10°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable







RAL9016 RAL9006 RAL9005



LM80 TM21 SDCM <3 IP 66

LED 45°C -10°C 198Vac 264Vac


DIMMABLE 1-10V DIMMABLE 3 StepDIM DALI


Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
STPOD-060	60	130	7800	>0,9	2700K - 3000K 4000K - 5000K 6500K	70+ / 80+	609x279x76	4,00	410x306x670	4
STPOD-075	75	130	9750				609x279x76	4,00	410x306x670	4
STPOD-100	100	125	12500				609x279x76	4,00	410x306x670	4
STPOD-125	125	125	15625				609x279x76	4,00	410x306x670	4
STPOD-150	150	120	18000				609x279x76	4,00	410x306x670	4


KOCHI
Streetlight Luminaire

SPECIFICATIONS:

Body:	Aluminium Injection Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic / Meanwell Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Diffuser:	4mm Tempered Glass / PMMA Lens High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	-10°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable







RAL9016 RAL9006 RAL9005



LM80 TM21 SDCM <3 IP 66


LED 45°C -10°C 198Vac 264Vac


DIMMABLE 1-10V DIMMABLE 3 StepDIM DALI


Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
STPKC-060	60	120	7200	>0,9	2700K - 3000K 4000K - 5000K 6500K	70+ / 80+	486x182x98	3,80	500x190x110	1
STPKC-080	80	116	9280				566x282x102	5,50	580x295x110	1
STPKC-100	100	125	12500				566x282x102	5,50	580x295x110	1
STPKC-120	120	122	14640				566x282x102	6,20	580x295x110	1
STPKC-150	150	118	17700				566x282x102	6,20	580x295x110	1
STPKC-180	180	122	21960				710x310x108	7,50	725x325x120	1
STPKC-220	220	118	25960				710x310x108	7,50	725x325x120	1
STPKC-240	240	113	27120				710x310x108	7,80	725x325x120	1

SPECIFICATIONS:

Body:	Aluminium Injection Body Electrostatic Powder Coated
Led:	Samsung / Osram LED Chip LM80 - 50.000 Hours Life Span
Driver:	Osram / Philips / Tridonic / Meanwell Constant Current - Efficiency >90% THD<20% - 50.000 Hours Life Span
Diffuser:	4mm Tempered Glass / PMMA Lens High Efficiency Upto 90%
PCB:	High Thermal Conductivity Aluminium MCPCB
Ambient Temperature:	-10°C — +45°C
Input Voltage	198-265Vac / 50-60Hz
Options:	Dimmable







RAL9016 RAL9006 RAL9005



LM80 TM21 SDCM <3 IP 66

LED 45°C -10°C 198Vac 264Vac

DIMMABLE 1-10V DIMMABLE 3 StepDIM DALI

Product Code	Power (W)	Efficiency (Lm/W)	Luminious Flux (Lm)	Power Factor	Colour Temperature	Colour Rendering Index	Product Dimension LxWxH (mm)	Product Weight (Kg)	Box Size (cm)	No. of Products in Box
STPLZ-180	180	130	23400	>0,9	2700K - 3000K 4000K - 5000K 6500K	70+ / 80+	793x337x70	6,50	820x376x375	3
STPLZ-200	200	128	25600				793x337x70	6,50	820x376x375	3
STPLZ-220	220	127	27940				793x337x70	6,60	820x376x375	3
STPLZ-240	240	124	29760				793x337x70	6,60	820x376x375	3

ZOLARIS

LUMINAIRE

Lighting the Future with Design, Efficiency & Innovation

ZOLARIS Luminaire provides LED and solar lighting solutions for indoor, commercial, industrial, outdoor, street, architectural, decorative, and custom-made projects.

Our professional engineering team supports clients with lighting selections, technical solutions, solar technology, and customized products designed to meet modern project requirements.

Product Range

LED Luminaires • Solar Lighting • Street Lighting • Bollards • Decorative Lighting • Custom-Made Solutions • Luxury Lighting Projects



For inquiries, technical support, and project solutions:

Email : export@zolarisluminaire.com

Website : http://www.zolarisluminaire.com/

Phone / WhatsApp: +905532092060

Address office/Factory:

Cerkesli mah Tavsancil sok no 72 Dilovası/Kocaeli

Turkey.